


Post Office Box 68
Hobbs, New Mexico

November 27, 1953

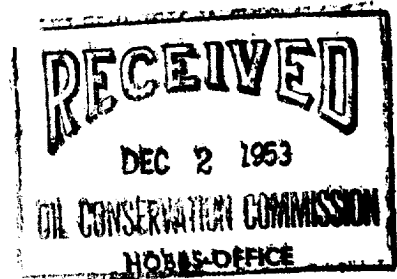

FILE: KJB-3077-401

SUBJECT: Application For Dual
Completion, State "C"
Tract 12 No. 6-X,
Drinkard Field.

New Mexico Oil
Conservation Commission
Santa Fe, New Mexico


Gentlemen:

Stanolind Oil and Gas Company hereby files application for the dual completion of its State "C" Tract 12 No. 6-X, located in the NW/4 of Section 16, T-21-S, R-37-E.

This well is now completed in the Drinkard pay at 6578' to 6604' and 6659' to 6670'. The applicant plans to perforate the Tubbs pay from 6185' to 6285', and dually complete, using a Production Retainer Packer, for Tubbs gas and Drinkard Oil production.

As required by Rule 112-A, the following are attached:

- (1) A plat showing the location of all wells on applicant's lease, and all offset wells on offset leases.
- (2) A sketch showing the manner and method of applicant's proposed dual completion.

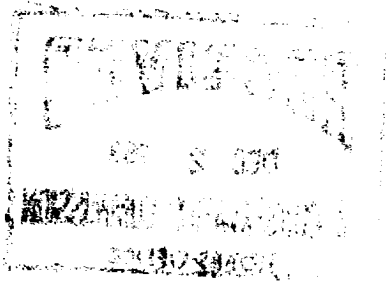


RECEIVED
JAN 10 1964
U.S. AIR FORCE
HONOLULU, HAWAII

RECEIVED
JAN 10 1964
U.S. AIR FORCE
HONOLULU, HAWAII

All offset operators have been furnished a copy of this letter of application, in order to notify them of applicant's intentions.

Yours very truly,

A handwritten signature in dark ink, appearing to read "Ralph L. Hendrickson". The signature is fluid and cursive, with the first name "Ralph" being more prominent.


Ralph L. Hendrickson
Field Superintendent

LAA:db

cc: Amerada Petroleum Corp.
Monument, New Mexico

Continental Oil Company
Hobbs, New Mexico

Gulf Oil Corporation
Hobbs, New Mexico

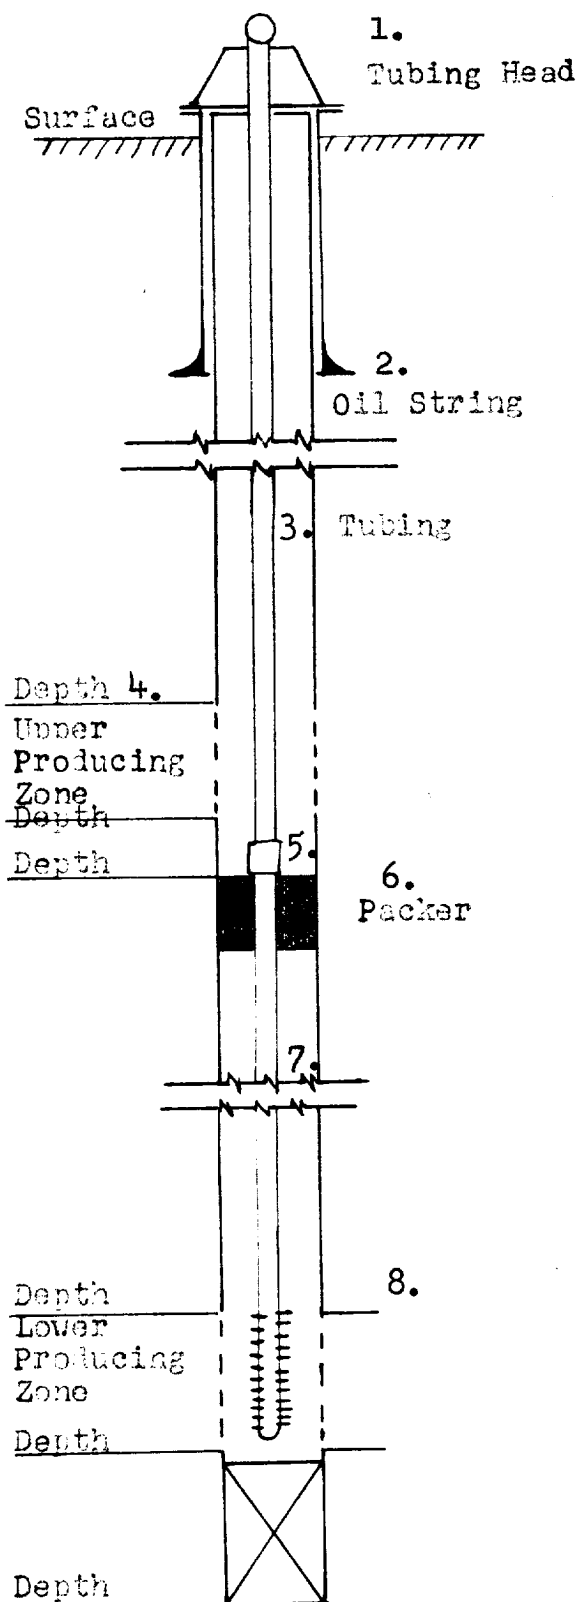

Lease and Well No. State "C" Tr. 12 #6X
 Field Drinkard Tubbs State New Mexico

DUAL COMPLETION EQUIPMENT	
ITEM	DESCRIPTION, MAKE AND SIZE
1.	Wellhead: 600 Series type 6-M Rector, 4000 psi test. Mandrel threaded for 2-1/2" tubing.
2.	Oil String: 7", 23#, J-55, set at 6694'.
3.	Tubing: 2-1/2", 6.5#, J-55, E.U.E. set to packer.
4.	Upper Perforations: Tubbs perforated from 6185' to 6285' with 2 jet shots per foot.
5.	Circulating Valve: Garrett Oil Tools Type "A", 2-1/2" immediately above packer.
6.	Packer: 7" Baker Retainer production packer, Model "D", set at 6500'.
7.	Tailpipe: 2", 4.7#, E.U.E., J-55, set from packer to approximately 6665'.
8.	Lower perforations: Drinkard perforated from 6578' to 6604' and from 6659' to 6670'.

STANOLIND OIL & GAS COMPANY

DUAL COMPLETION SKETCH

SCALE:

DRG.
No.

