


SCOUT REPORT

Drinkard 2-A

NEW MEXICO OIL CONSERVATION COMMISSION

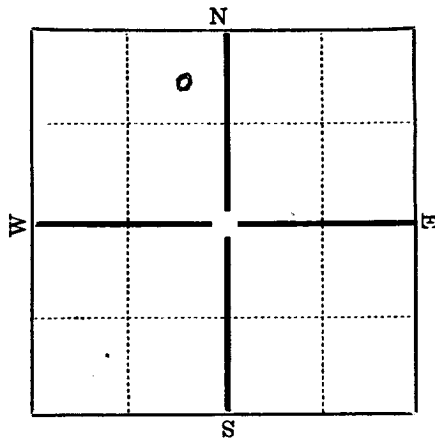

Company Stanolind Oil & Gas
 Farm Name State C Tract 12 Well No. 6-X
 Sec. 16 Twp. 21-S Range 37E County Lea
 Feet from Line: 720 N. S. E. 1980 -W.
 Elevation 3499' Method
 Contractor Carper
 Spudded 5-6-48 Completed 7-14-48

AMOUNT
CASING & CEMENTING RECORD

Size	Feet	Inches	Sax Cement
13 3/8	297		300
9 5/8	2953		1500
7 1/2	6674		1000

TUBING RECORD

2" 6670

PACKER

ACID RECORD

Gals.

A, A - 500

A, A - 1500

Top Pay 6565
~~1596~~
 6578

TA <u>1280</u>	TG
TX	TSA <u>3985</u>
TCA	TGI <u>5230</u>
BX <u>2555</u>	TPen <u>6105</u>
TY	TABo
TSR	TPenn
TQ	TOrd

SHOOTING RECORD

No. of Quarts	From	To
No. of Quarts	From	To
S/	S/	S/
S/	S/	S/
S/	S/	S/

Date	Drilg. @ 1400' Anhydrite.	Date	
MAY 19	TD 2935 A - woc - ran log		DST 6' 50 - 5300
MAY 28	Ø 4270 Salomites		20 min. - gas mud
MAY 31	Ø 4810 L		A surface in 2 min.
JUN 9	TD 6042 taking a DST		1st
JUN 16	Running 6549.		Rec. 20' distance
	DST 5939-6042 open to		FP- 2200
	shady flow air, Rec. 130'	JUN 23	TD 6615 L. Prep.
	alt oil cut mud, FP- 0'		to cov ahead.
	15' build up - 800K	JUN 30	TD 6699, 2 in.
			Running at 6580.

DST - 6375-65 - Open/ls. Has/70, Est 200 mag
Rec 1710 oil - 90' mud & ...

~~Core~~ DST - 6375-669 - Open/ls. Has/5 min, Has 170 mag
Rec 6180 oil - 30' mud & 1/2 XW, 405' oil & gas
F B & P - 1000

JUL 7 TD 6699 Prep to reef 7" esp. 7" Prof. 6680
Retain at 6669; Ag. 75 sac. Core out 1000
Sand well down after A A - no flow. Flowed 2800 - 4 hrs.
1 1/2" oil. after L & K, - Std 120.4 - 400.0 - .6% W. 10.7
8'3.8 ME F.

JUL 14 TD 6699 Oolot & Intg.

JUL 21 TD 6699 old PB - 6670
1 PF 120 3000 41.0° NOR - 645

C101 -	5/4	5/10
C102 -	13 ³	5/10
C103 -	13 ³	5/12
C102	9 ⁵	5/24
C103 -	-	5/28
		7/6
C110 -	May -	7/16