


OIL CONSERVATION COMMISSION

SANTA FE, NEW MEXICO

Miscellaneous Reports on Wells

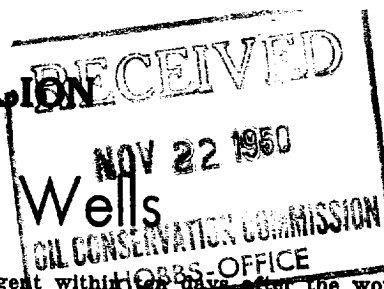

Submit this report in triplicate to the Oil Conservation Commission or its proper agent within 10 days after the work specified is completed. It should be signed and sworn to before a notary public for reports on beginning drilling operations, results of shooting well, results of test of casing shut off, result of plugging of well, and other important operations, even though the work was witnessed by an agent of the Commission. Reports on minor operations need not be signed and sworn to before a notary public. See additional instructions in the Rules and Regulations of the Commission.

Indicate nature of report by checking below.

REPORT ON BEGINNING DRILLING OPERATIONS		REPORT ON REPAIRING WELL	
REPORT ON RESULT OF SHOOTING OR CHEMICAL TREATMENT OF WELL		REPORT ON PULLING OR OTHERWISE ALTERING CASING	
REPORT ON RESULT OF TEST OF CASING SHUT-OFF		REPORT ON DEEPENING WELL	
REPORT ON RESULT OF PLUGGING OF WELL		Report on Dually Completing	X

November 16, 1950

Hobbs, New Mexico

OIL CONSERVATION COMMISSION,
SANTA FE, NEW MEXICO.
Gentlemen:

Following is a report on the work done and the results obtained under the heading noted above at the

Continental Oil Company

L. E. Wanta

Well No. 3-D In the

Company or Operator

Lease

SK/4

of Sec. 21

T. 21 South

R. 37 East

N. M. P. M.

Drinkard

Field

Lea

County.

The dates of this work were as follows: 9-22-50 to 11-6-50.

Notice of intention to do the work was (WEL 102) submitted on Form C-102 on 9-22-50 19

and approval of the proposed plan was (XXXXXX) obtained. (Cross out incorrect words.)

DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

By authority granted by the New Mexico Oil Conservation Commission order No. R-21, dated July 13, 1950, Wanta No. 3-D was dually completed as follows:

Killed well with oil and pulled tubing. Set Baker Production packer at 6525. Displaced oil above packer with mud and pulled tubing. Perforated 7" casing from 6120 to 6190 with 280 holes. Ran tubing and displaced mud with oil. Swabbed oil load and acidized through perforations with 1,000 gallons acid. Set tubing down on packer and swabbed in Drinkard.

(Over)

Witnessed by E. Z. Kellerman

Name

Continental Oil Company

Company

Drilling Foreman

Subscribed and sworn before me this 16th

day of November, 1950

E. J. McCormick

Notary Public

I hereby swear or affirm that the information given above is true and correct.

Name

E. L. Shaper

Position District Superintendent

Representing Continental Oil Company

Company or Operator

My commission expires 5-17-53

Address Box 60, Hobbs, New Mexico

Remarks:

Roy Yachroch

Oil & Gas Inspector

Title

NOV 22 1950

On initial potential flowed 5,370 MCF gas in 24 hours from Tubb Sand through perforations 6120 to 6190. Shut in pressure 1085.7 PSI abs.

Perforations open for production below packer from Brinkard Pay: 6546 to 6553, 6558 to 6564, 6568 to 6573 and 6580 to 6584.

A schematic sketch of the above installation is attached hereto.