


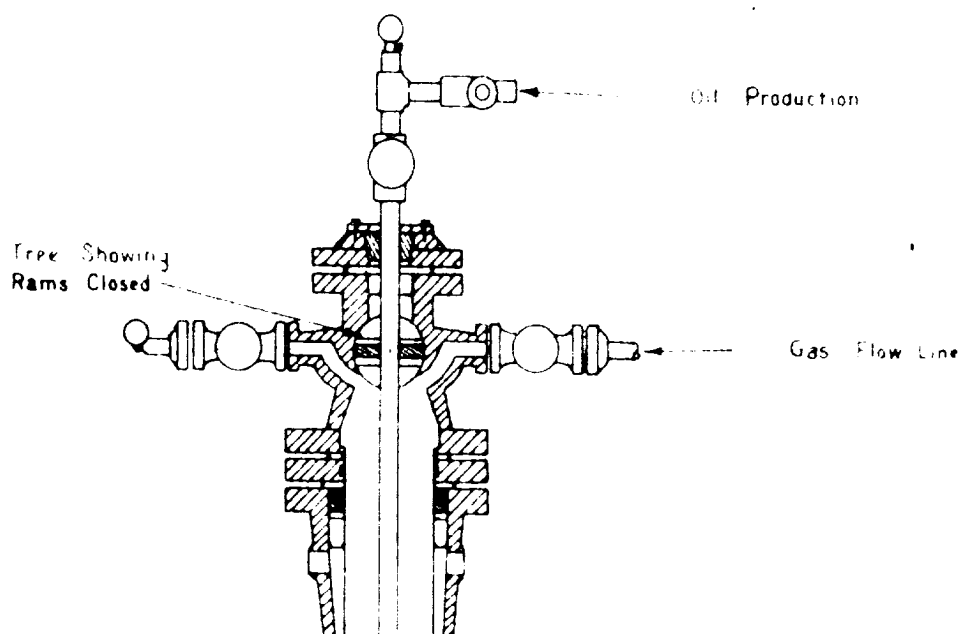

11T Joints 2 1/2" 10V Thd
(3678') Tubing

9 5/8" Casing Cemented @ 1439'
Cement Circulated To Surface w 475
sx cement

Casing Perforated w 2" x 2"
Gram Shot in the
following intervals:
3075 - 3110'
3135 - 3220'
3240 - 3280'
3320 - 3375'
3400 - 3460'
3525 - 3555'

LH Releasing Safety
Joint @ 3678'

Camco Type MM Retractable Valve Mandrel,
Blacked Off, @ 3681'

Baker Model D Retainer
Production Packer @ 3696'

Tubing Perf. 3701' - 3704'
1 Joint 2" EUE Tubing
Below Tubing Perforations
Tubing Hung @ 3736'

Seating Nipple @ 3670'

7" Casing Cemented @ 3741'
w 175 sx Regular

TD 3891'

WELLS CO. COMPANY
MIDLAND AREA PRODUCTION DEPARTMENT
NORTHERN DIVISION

Detail Of Mechanical Equipment
Installed In Dually Completed
State A-2 Eunice Field