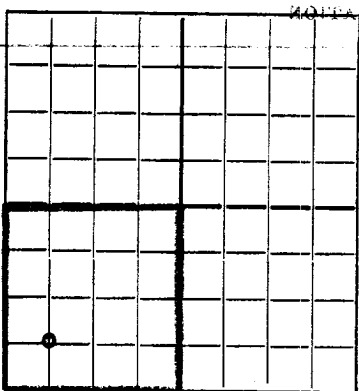


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

DUPLICATE

AREA 640 ACRES
LOCATE WELL CORRECTLY

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Gulf Oil Corporation

J. F. Janda C

Company or Operator

Lease

Well No. 2 in SW SW of Sec. 15, T. 21S

R. 36E, N. M. P. M., Eunice Field, Lea County.

Well is 660 feet south of the North line and 660 feet west of the East line of SW SW

If State land the oil and gas lease is No. B-229 Assignment No.

If patented land the owner is Address

If Government land the permittee is Address

The Lessee is Gulf Oil Corporation Address Tulsa, Oklahoma

Drilling commenced June 6th, 1936 Drilling was completed August 3rd, 1936

Name of drilling contractor Olson Drlg. Co. Address Tulsa, Okla.

Elevation above sea level at top of casing 3611' feet.

The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 3805' to 3909' No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from No record - Rotary hole to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM	TO	PURPOSE
10-3/4	32	8	Lapwld.	302'	?				
7-5/8	26	10	Lapwld.	1499'	?				
5-1/2	17	10	Lapwld.	3802'	?				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
13-3/4	10-3/4	302'	250	Halliburton		
9-7/8	7-5/8	1499'	275	Halliburton		
6-3/4	5-1/2	3802'	275	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 3909' feet, and from feet to feet

Cable toops were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing July 22nd, 1936

The production of the first 24 hours was 300 barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

Driller Driller

Driller Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 28th.

Tulsa, Oklahoma August 28, 1936

day of August, 1936

Name Date

Position General Superintendent

Representing Gulf Oil Corporation

Notary Public

My Commission expires March 16, 1940

Company or Operator.

Address Tulsa, Oklahoma

FORMATION RECORD

FORM 1000

FROM	TO	THICKNESS IN FEET	FORMATION
0	91		calcechi & sand
	181		sand & shells
	254		sand
	304		red bed
	445		red bed
	554		red bed & shells
	907		red bed
	1036		red rock, shale & shells
	1181		red rock, shale, sand & shells
	1256		red rock & shale
	1317		red rock & shale
	1380		red rock, shale & shells
	1411		red rock & shale
	1425		anhydrite - hard
	1468		anhydrite
	1501		anhydrite
	1503		anhydrite
	1511		salt & shale
	1620		salt
	1768		salt & anhydrite
	1831		salt & shale
	1938		salt & anhydrite
	1968		salt & anhydrite
	2060		salt
	2178		salt & potash
	2306		salt & anhydrite
	2415		salt & shells
	2555		salt & shells
	2630		salt & shells
	2650		salt & anhydrite
	2684		salt & shells
	2730		anhydrite - hard
	2745		anhydrite
	2760		brown lime
	2780		anhydrite
	2827		anhydrite & lime
	2915		brown lime & anhydrite
	2927		brown lime
	2937		sandy lime
	2944		lime
	2983		lime
	2994		brown sandy lime
	3026		lime & potash
	3048		brown lime
	3112		brown lime
	3125		lime & anhydrite
	3189		brown lime
	3304		lime
	3321		lime & anhydrite
	3350		brown lime & anhydrite
	3436		lime & anhydrite
	3564		lime
	3575		lime - grey
	3652		lime
	3688		lime - grey
	3708		lime
	3767		lime - grey
	3860		lime
	3896		lime - soft
	3904		lime - hard
	3909		lime
	3909		TOTAL DEPTH