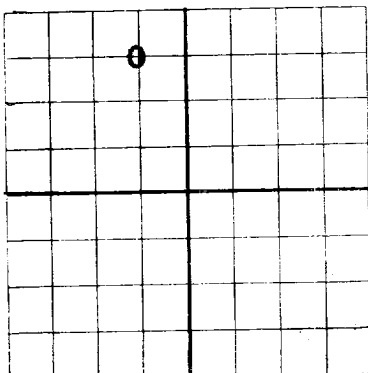



N

NEW MEXICO OIL CONSERVATION COMMISSION

AREA 640 ACRES
LOCATE WELL CORRECTLY

Santa Fe, New Mexico

WELL RECORD

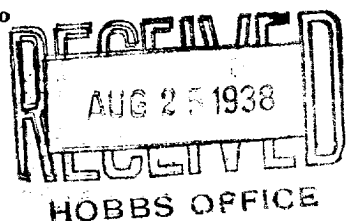

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

DUPLICATE

Two States Oil Company,

Hobbs, New Mexico,

Company or Operator

Address

Lonnie Hill

Well No. 1-B

in C. Lot 3

of Sec. 5

T. 21 S.,

Lease

R. 37 E.,

N. M. P. M.,

Hardy

Field,

Lea

County.

Well is 660

feet south of the North line and

1980

feet ~~xxx~~ of the ~~xxx~~ line of

Sec. 5-21S-37E.

If State land the oil and gas lease is No. -----

Assignment No. -----

If patented land the owner is Lonnie Hill

Address

Nadine, New Mexico.

If Government land the permittee is -----

Address

The Lessee is Gulf Oil Corp.-Two States Oil Co.,

Address

Assignee, Tulsa, Okla.,

Drilling commenced July 29,

19 38

Drilling was completed

August 22,

19 38.

Name of drilling contractor

Two States Drlg. Co.,

Address

Hobbs, New Mexico.

Elevation above sea level at top of casing

3489

feet.

The information given is to be kept confidential until -----

19

OIL SANDS OR ZONES

No. 1, from 3674 to 3767

No. 4, from ----- to -----

No. 2, from ----- to -----

No. 5, from ----- to -----

No. 3, from ----- to -----

No. 6, from ----- to -----

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from ----- to ----- feet.

No. 2, from ----- to ----- feet.

No. 3, from ----- to ----- feet.

No. 4, from ----- to ----- feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
7 5/8"	26#		Seamless	292'	Float				Surface
5 1/2"	15#		Seamless	3498'	Float				Oil String
2"			Upset	3707			3687	3707	Tubing

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
8 1/2"	7 5/8	292	200	Halliburton		Circulated.
6 1/2"	5 1/2	3498	225	"		"

PLUGS AND ADAPTERS

Heaving plug—Material ----- Length ----- Depth Set -----

Adapters—Material ----- Size -----

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
3"		Nitro-glycerin	300 Qts	8/21/38	3567-TD	TD

Results of shooting or chemical treatment Well tested 1 BOH natural, after shot tested 10 BOH.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 3767 feet, and from ----- feet to ----- feet

Cable tools were used from ----- feet to ----- feet, and from ----- feet to ----- feet

PRODUCTION

Put to producing August 22, 19 38

The production of the first 24 hours was 240 barrels of fluid of which 100 % was oil; 0 %

emulsion; 0 % water; and 0 % sediment. Gravity, Be -----

If gas well, cu. ft. per 24 hours 200,000 Gallons gasoline per 1,000 cu. ft. of gas -----

Rock pressure, lbs. per sq. in. -----

EMPLOYEES

Two States Drilling Company, Driller ----- Driller -----

Driller -----

Driller -----

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 24th

Roswell, New Mexico, Aug. 24, 1938.

day of August, 19 38

Name J. B. Bradley

Position Consultant,

Representing Two States Oil Company,

Company or Operator

Address Box 1017, Roswell, New Mexico.

My Commission expires

July 8, 1941

Notary Public

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	130		Sandstone
	1350		Redrock, shale
	1402		Anhydrite
	2550		Salt and Anhydrite
	2676		Anhydrite, gyp
	2709		Anhydrite and limestone
	2782		Anhydrite and gyp
	2910		Anhydrite and limestone
	3500		Anhydrite and limestone
	3767		Limestone. TD.