


DUPLICATE

RECEIVED  
JUN 10 1949  
NOBBS OFFICE

FORM C-105

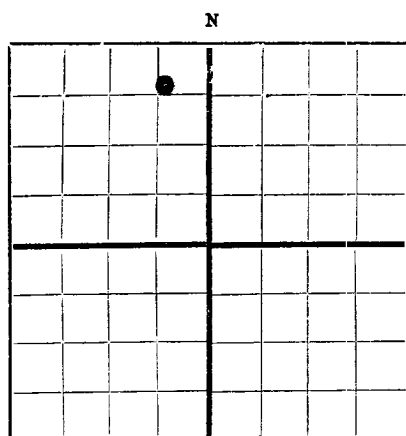

AREA 640 ACRES  
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION  
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

E. G. Rodman et al  
Company or Operator  
Lee  
Well No. 3  
NE/4-NW/4  
of Sec. 20  
T. 21S  
37E  
N. M. P. M. Drinkard  
Field, Lea  
County.  
Well is 800 feet south of the North line and 1980 feet East of the West line of Sec. 20-21S-37E  
If State land the oil and gas lease is No. Assignment No.  
If patented land the owner is J. G. Randall Address Eunice, N. M.  
If Government land the permittee is Address  
The Lessee is E. G. Rodman Address Odessa, Texas  
Drilling commenced 4-30-1949 Drilling was completed 6-8-1949  
Name of drilling contractor Davidson Drilling Company Address Odessa, Texas  
Elevation above sea level at top of casing 3494 feet.  
The information given is to be kept confidential until 19.

OIL SANDS OR ZONES

No. 1, from 6635 to 6674 No. 4, from to  
No. 2, from to No. 5, from to  
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 85 to 120 feet.  
No. 2, from to feet.  
No. 3, from to feet.  
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
13-3/8	50	8	J&L	235	Float				Surface
8-5/8	32	8	J&L	2647	Float				Intermediate
5-1/2	17	8	J&L	6631	Float				Oil String

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
16"	13-3/8	235	175	Halliburton		200 Sacks
11"	8-5/8	2658	650	"		190 Sacks
7-5/8	5-1/2	6631	300	"		260 Sacks

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set  
Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Mud Acid	500 Gal.	6/8/49	6631 -	6674

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from top feet to 6674 feet, and from feet to feet  
Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing 6-8-1949  
The production of the first 24 hours was 345 barrels of fluid of which 98% was oil; 2% emulsion; % water; and 1% sediment. Gravity, Be. 37°  
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas  
Rock pressure, lbs. per sq. in.

EMPLOYEES

Jack Gotthardt Driller M. Ferrell Driller  
John Clement Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this ninth day of June, 1949  
Jeanne Sheets Notary Public  
My Commission expires June 1, 1951  
Odessa, Texas June 9, 1949  
Name E. G. Rodman  
Position Owner  
Representing E. G. Rodman et al  
Company or Operator  
Address Box 591, Odessa, Texas

## FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	151	151	Surface
151	160	9	Surface Sand
160	1215	1055	Red Bed
1215	1279	64	Anhydrite
1279	1397	118	Anhydrite and Red Bed
1397	2510	1113	Salt and Anhydrite
2510	2670	160	Anhydrite and Gyp
	2670		8-1/4" Casing Set
2670	3010	340	Anhydrite
3010	3320	310	Anhydrite and Lime
3320	6631	3311	Lime
	6631		5-1/2" Casing Set
6631	6635	4	Lime Top of Pay
6635	6674	39	Lime T. D.