


TRIPPLICATE

RECEIVED
DEC 12 1947

FORM C-105

N

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

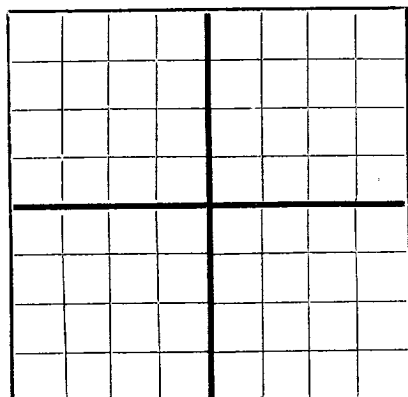

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

REPOLLO OIL COMPANY

Box 1427 Hobbs New Mexico

Company or Operator

Address

A. M. YORK "A"

Well No. 1

in NE 1/4

of Sec. 20

T. 21S

Lease

R. 37E, N. M. P. M. DRINKARD Field, LEA County.

Well is 2310 feet south of the North line and 330 feet west of the East line of E half of NE 1/4

If State land the oil and gas lease is No. Assignment No.

If patented land the owner is A. M. YORK, Address.

If Government land the permittee is, Address.

The Lessee is, Address.

Drilling commenced Sept. 9, 1947 19. Drilling was completed Nov. 3, 1947 19.

Name of drilling contractor EASTLAND OIL CO., Address.

Elevation above sea level at top of casing 3486 feet.

The information given is to be kept confidential until 19.

OIL SANDS OR ZONES

No. 1, from 6490 to 6610 No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
5" OD	15	8		6649			6575	6610	Oil
2" UE	4.7	8		6623					

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
6 1/2	5"	6649	250			

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
	None					

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 3850 feet to 6650 feet, and from feet to feet

Cable tools were used from None feet to feet, and from feet to feet

PRODUCTION

Put to producing Nov. 16, 1947 19.

The production of the first 24 hours was 396 barrels of fluid of which 100 % was oil; %

emulsion; % water; and % sediment. Gravity, Be.

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

EASTLAND OIL CO. (W.D. Norman), Driller J. D. Burke, Driller

R. R. Burke, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 4th

day of Nov. 1947

Notary Public

My Commission expires 2-4-50

Hobbs, New Mex. Nov. 4th, 1947

Name J. D. Burke

Position Dist. Supt.

Representing REPOLLO OIL CO.

Company or Operator

Address Box 1427 Hobbs, New Mex.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
3850	4472	622	Line
4472	4512	40	Broken line
4512	5935	1423	Line
5935	5958	63	Line and Gyp
5958	6650	692	Line