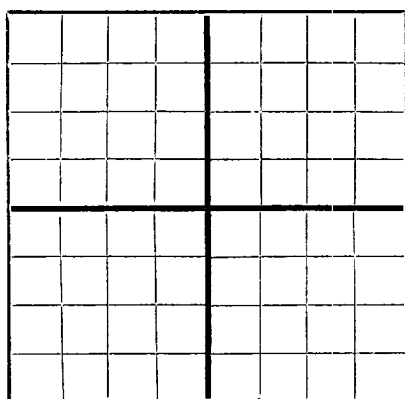


RECEIVED
JUL 1 1948
REGISTRY
MODESS OFFICE

N

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New MexicoAREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

E. G. Rodman et al Box 591, Odessa, Texas
Company or Operator Address
Lee Well No. 2 in NW/4-NE/4 of Sec. 20 T. 21-S
Lease
R. 37-E, N. M. P. M., Drinkard Field, Rea County.
Well is 440 feet south of the North line and 1650 feet west of the East line of Sec. 20-21S-37E
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is J. C. HANDLE Address Snyder, Texas
If Government land the permittee is Address
The Lessee is E. G. Rodman Address Odessa, Texas
Drilling commenced December 29 1947 Drilling was completed Feb. 11 1948
Name of drilling contractor Helderich & Payne Address Oklahoma City, Okla.
Elevation above sea level at top of casing 3483 feet.
The information given is to be kept confidential until 19

Base of Salt 2490

OIL SANDS OR ZONES

No. 1, from Top of Brown line 2560 No. 4, from Top of Glorieta 5160
No. 2, from Top of Yates to 2660 No. 5, from Top of Tubbs to 6180
No. 3, from Top of White Line 3330 No. 6, from Top of Pay to 6568
Top of San Andreas 3960 Pay to total Depth -6658

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 90' to 120' feet. 20 Barrels per hour
No. 2, from 3930 to 3936 feet. 30 Barrels per hour
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
12 1/2"	50	8	SH	190'	T.P.				Surface
8-5/8"	32	8	J & L	2634'	Float				Intermediate
5 1/2"	15	8	J & L	6577'	Float				Oil String

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
16"	12 1/2"	190'	250	Haliburton	11#	100 Sacks
11"	8-5/8"	2634'	850	Haliburton	10#	500 Sacks
7-3/4"	5 1/2"	6577'	625	Haliburton	10#	400 Sacks

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
			2000 Gal	2/15/48	6630'	

Results of shooting or chemical treatment Increased production from 245 Bbls. per day to 360 Bbls. per day.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet
Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing February 11 1948
The production of the first 24 hours was 245 barrels of fluid of which 98.5% was oil; .5% emulsion; .4% water; and .6% sediment. Gravity, Be. 37
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

W. Lewis Driller J. L. Ferguson Driller
C. R. Monk Driller S. M. Darnell Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 9
day of June 1948

Notary Public

My Commission expires June 1, 1949

Odessa, Texas 2/12/48
Name E. G. Rodman
Position Owner
Representing E. G. Rodman et al
Company or Operator
Address Box 591, Odessa, Texas

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	160	160	Shells Sand Red Rock
160	219	59	Shells Red Rock
219	319	100	Red Rock Shells
319	1295	976	Red Rock Shells
1295	1400	105	Red Rock Anhydrite
1400	1530	130	Salt & Anhydrite
1530	1610	150	Red Rock, Anhydrite, Salt, Potash
1610	1870	190	Salt & Anhydrite
1870	2563	693	Salt & Anhydrite
2563	2640	77	Anhydrite Set. 8-5/8" Casing
2640	2978	338	ANHYDRITE
2978	3555	577	Anhydrite Sandy
3555	3742	163	Anhydrite & Lime
3742	6577	2835	Lime Set 5 1/2" Casing
6577	6658	81	Lime T. D.