


CONTINENTAL OIL COMPANY
Blow-out Preventer Specifications

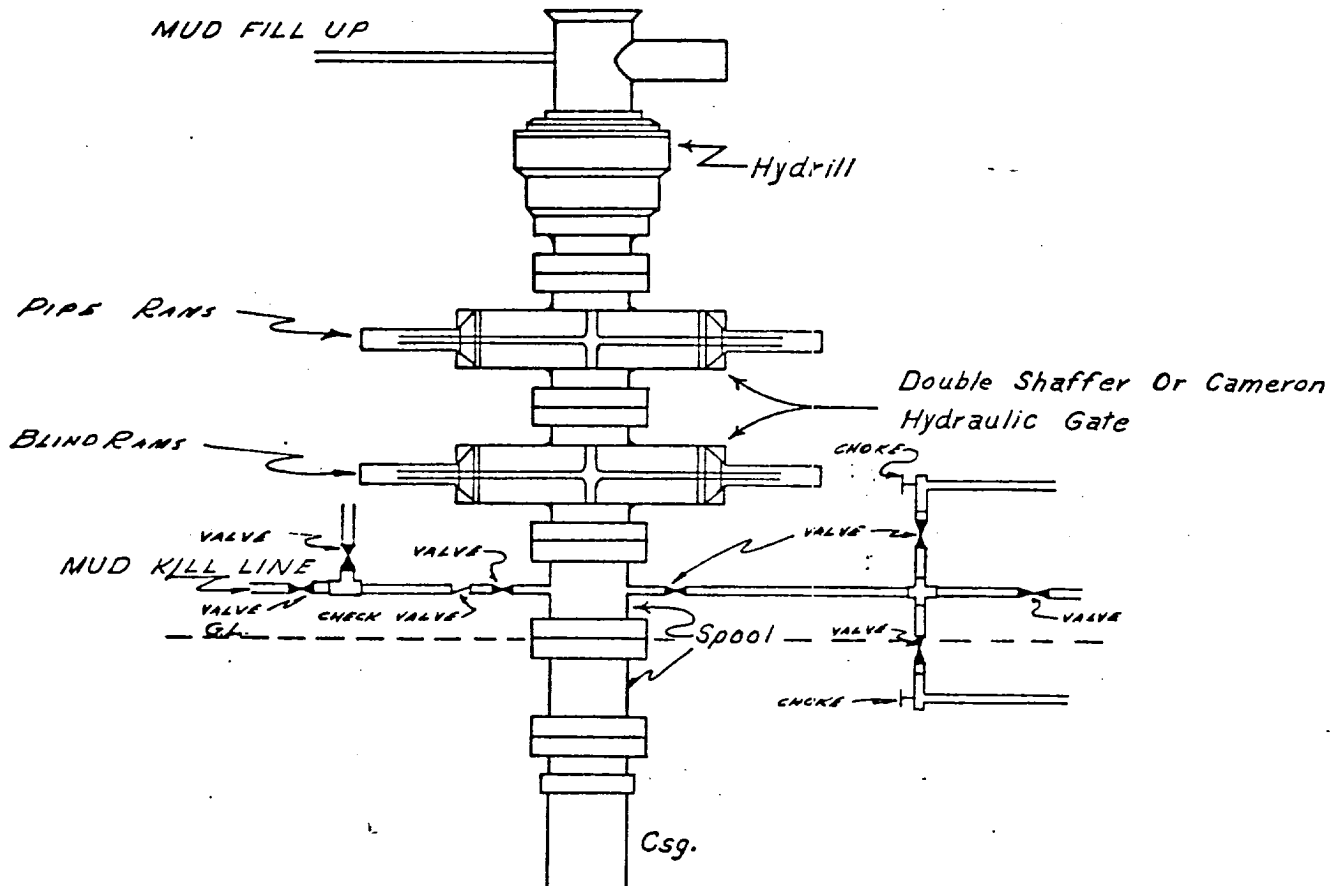

NOTE:

Manual and Hydraulic controls with closing unit no less than 75' from well head.
Remote controls on rig floor.

**DUE TO SUBSTRUCTURE CLEARANCE,
HYDRILL MAY OR MAY NOT BE USED.**

RECEIVED
AUG 21 1980
U.S. DEPARTMENT OF JUSTICE

RECEIVED
AUG 27 1980
U.S. DEPARTMENT OF JUSTICE

8/15/81
North Carolina
[Signature]