


BLOWOUT PREVENTER SKETCH
Nearburg Producing Company
MINIS FEDERAL WELL NO. 1

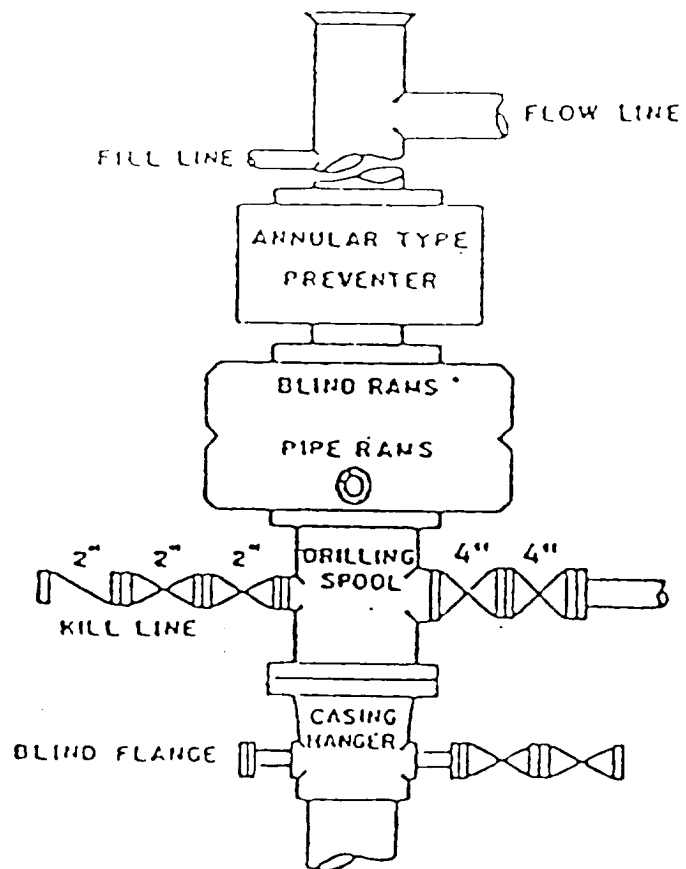

900 SERIES

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUBMIT IN TRIPPLICATE*
(Other instructions on re-
verse side)

Form approved.
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

14001

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Minis Federal

9. WELL NO.

1

10. FIELD AND POOL, OR WILDCAT

Hat Mesa Morrow

11. SEC., T., R., M., OR BLK. AND
SURVEY OR AREA

Section 1-T21S-R32E

12. COUNTY OR PARISH 13. STATE

Lea

NM

1. OIL WELL ☐ GAS WELL ☐ OTHER Dry

2. NAME OF OPERATOR

Gulf Oil Corporation

3. ADDRESS OF OPERATOR

P. O. Box 670, Hobbs, NM 88240

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*
See also space 17 below.)
At surface

3300' FNL & 1650' FEL

14. PERMIT NO.

15. ELEVATION (Show whether DE, RT, GR, etc.)

3738' GL

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

(Other)

PULL OR ALTER CASING

MULTIPLE COMPLETE

ABANDON*

CHANGE PLANS

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other)

P&A

REPAIRING WELL


ALTERING CASING

ABANDONMENT*

(NOTE: Report results of multiple completion on Well
Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Twisted off DP at 12,907', fished. Ran DST. TD 8½" hole 10:30 P.M., 3-24-82. Logs complete 8:30 A.M., 3-27-82. Set plug 13,310'-13,510' with 75 sacks Class "H". WOC. TIH to tag plug, no plug at 13,310'. Cement with 75 sacks Class "H". WOC. Tag plug at 13,310'. Cement 12,864'-13,064' with 75 sacks Class "H". Cement 10,736'-10,936' with 75 sacks Class "H". WOC. TIH, did not tag. Cement with 75 sacks Class "H". WOC. Tag cement at 10,736'. Pump 55 sacks Class "H" 9728'-9878'. Pump 85 sacks Class "G" 4874'-5074'. Pump 130 sacks Class "H" 3000'-3300'. Pump 175 sacks Class "H" 1460'-1860'. Install dry hole marker. P&A per instructions from Rodger Chapman with USGS (Roswell) to Arthur Budge 3-26-82. P&A complete 3-29-82.



OIL & GAS
U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

18. I hereby certify that the foregoing is true and correct

SIGNED

R.D. Pite

TITLE

Area Engineer

DATE

4-2-82

(This space for Federal or State office use)

APPROVED BY

CONDITIONS OF APPROVAL, IF ANY:

TITLE

DATE

OCT 13 1982

JAMES A. CILHAM
DISTRICT SUPERVISOR

*See Instructions on Reverse Side

RECEIVED

OCT 14 1982

O.C.D.
HOBBS OFFICE