


CONOCO INC.

Blow-out Preventer Specifications

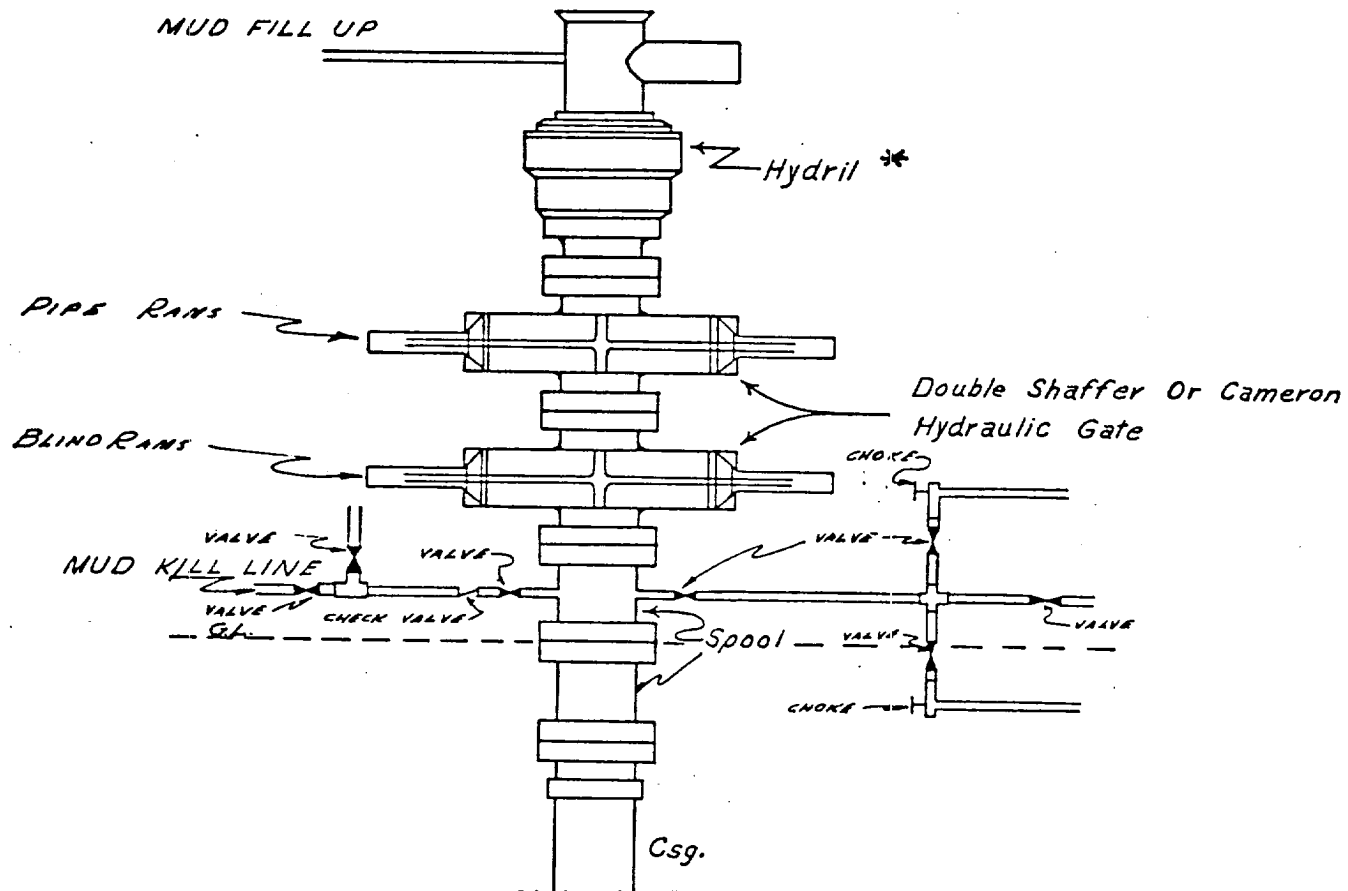

NOTE:

Manual and Hydraulic controls with closing unit no less than 75' from well head.
Remote controls on rig floor.

*

DUE TO SUBSTRUCTURE CLEARANCE, HYDRIL
MAY OR MAY NOT BE USED.

Rec'd 12.14-87

ELF

RECEIVED
JAN 5 1988
OFFICE OF THE
ATTORNEY GENERAL