

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
ROSWELL, NEW MEXICO 80245

FORM APPROVED
Budget Bureau No. 004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT-" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well ☐ Oil Well ☒ Gas Well ☐ Other	5. Lease Designation and Serial No. NM-90539
2. Name of Operator Penwell Energy, Inc.	6. If Indian, Allottee or Tribe Name
3. Address and Telephone No. 600 N. Marienfeld, Suite 1100, Midland, TX 79701 - 915-683-2534	7. If Unit or CA, Agreement Designation
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) 1980' FSL & 660' FWL Sec. 22, T21S, R32E	8. Well Name and No. Bilbrey N."22" Fed #1
	9. API Well No. 30-025-33320
	10. Field and Pool, or Exploratory Area Bilbrey - Morrow
	11. County or Parish, State Lea County, New Mexico

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
☒ Notice of Intent	☒ Abandonment
☐ Subsequent Report	☐ Recompletion
☐ Final Abandonment Notice	☐ Plugging Back
	☐ Casing Repair
	☐ Altering Casing
	☐ Other _____
	☐ Change of Plans
	☐ New Construction
	☐ Non-Routine Fracturing
	☐ Water Shut-Off
	☐ Conversion to Injection
	☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

BILBREY NORTH "22" FEDERAL #1

1. Run tubing to 14250'.

2. Load hole with 350 bbls. gelled brine.

3. Spot 35 sx. cmt., 13920' - 14250'. *Tag plug.*

4. Cut 5 1/2" csg. at 3300', pull csg.

5. Spot 750 sx. cement 1150' - 3300'.

6. Spot 5 sx. cement ~~9-10'~~ 50' minimum surface plug.

7. Cut off wellhead 3' below ground - cap with 1/4" steel plate.

** additional plugs:*
1. 180' cmt. plug 8790' - 8610'.
2. 150' cmt. plug 5015' - 4865'.

RECEIVED
1998 JUL 31 A 11:49
BUREAU OF LAND MGMT.
ROSWELL, NEW MEXICO

APPROVED *at*
PETER W. CHESTER
AUG 25 1998
BUREAU OF LAND MANAGEMENT
ROSWELL RESOURCE AREA

14. I hereby certify that the foregoing is true and correct

Signed *Russell L. Corbett*

Title Engineer

Date 07/29/98

(This space for Federal or State office use)

Approved by _____
Conditions of approval, if any:

Title _____

Date _____

BILBREY North "22" FEDERAL #1
1980' FSL & 660' FWL SEC 22 T21S R32E
LEA CO N.M.
DRILL 11 & 12 / 94

1255' 13³/₈" 54.5# J-55 @ 1255' / CMT w/
875 SK / CMT CIRC.

3970' TOP OF CMT 3970'

4940' 9⁵/₈" 47# L-80 @ 4940' / CMT w/ 2700 SK
CMT CIRC.

8993' DV TOOL : CMT w/ 1300 SK / TOC 3970'

TUBING: 448 JTS 2³/₈" 4.7# P-110 8R 7HB MOD @
14324' PERFD @ 14224' / COLLAR STOP @ 14169'
PACKER: HALLIBURTON BWR @ 14251'

14324

PERFS: 14324-76 & 14381-94 (67 HOLES TOTAL)
(MIDDLE MORROW)

14394


14927 5¹/₂" 20# L-80 & S-95 @ 15019' / CMT w/
2000 SK / CMT CIRC TO DV TOOL /
15019' FC @ 14927

BILBREY NORTH "22" FEDERAL #1

1980' FSL & 660' WL SEC 22 T21S R32E

LEA Co. N.M.

PROPOSED PLUGGED WELL BORE

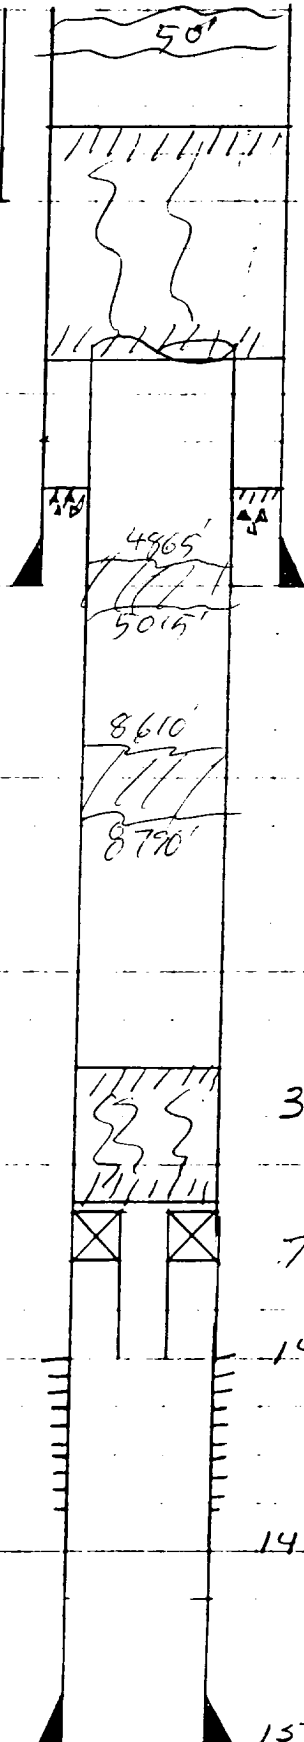

750 SK CMT 1150' - 3300'
1255 13 3/8" @ 1255'

C4T 5 1/2" @ 3300'

TOC : 3970'

4940' 9 5/8" @ 4940'

35 SK CMT 13920 - 14250

HALLIBURTON "BWB" PERMANENT PLUG @ 14251'

14324

14394

15019 5 1/2" @ 15019