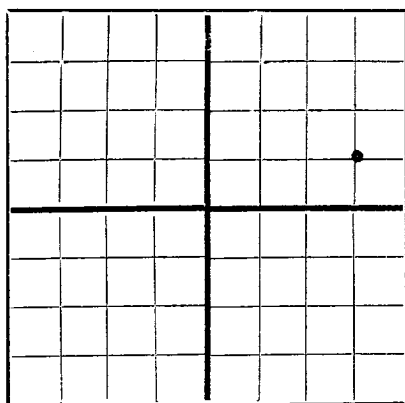



N

AREA 640 ACRES
LOCATE WELL CORRECTLYNEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Gulf Oil Corporation **Hebbs, New Mexico**
Company or Operator Address
A. L. Christmas Well No. **2** in **SE NE** of Sec. **27**, T. **22S**
Lease
R. **36E**, N. M. P. M. **South Eunice** Field, **Lea** County.
Well is **1980** feet south of the North line and **660** feet west of the East line of **Section 27**
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is **B. L. King**, Address **Eunice, New Mexico**
If Government land the permittee is, Address
The Lessee is **Gulf Oil Corporation - Cypay Division**, Address **Tulsa, Oklahoma**
Drilling commenced **March 12** 1949 Drilling was completed **April 8** 1949
Name of drilling contractor **Parker Drilling Company**, Address **Tulsa, Oklahoma**
Elevation above sea level at top of casing **3512** feet.
The information given is to be kept confidential until 19.

OIL SANDS OR ZONES

No. 1, from **3185'** to **3590'** No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to **(ROTARY TOOLS)** feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
9 5/8"	36#	8 Rd	SS	291'					
5 1/2"	15.5#	"	"	3162'					

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
12 1/4"	9 5/8"	304'	200	HOWCO		
7 7/8"	5 1/2"	3174'	400	"		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		None				

Results of shooting or chemical treatment
.....
.....

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from **0'** feet to **3600'** feet, and from feet to feet
Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing, 19.
The production of the first 24 hours was barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be.
If gas well, cu. ft. per 24 hours **8,452 MCF** Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

Parker Drilling Company, Driller, Driller
Driller, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this **22nd**day of **April**, 19 **49**
Notary PublicMy Commission expires **10-24-49****Hebbs, New Mexico** **April 22, 1949**
Place DateName **E. H. Taylor**Position **General Foreman**Representing **Gulf Oil Corporation**
Company or OperatorAddress **Box 1667, Hebbs, New Mexico**

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	308		Caliche and red bed
	429		Red bed
	826		Red bed and shells
	1120		Red bed and shale
	1380		Shale and shells
	1500		Shale and shells
	1545		Anhydrite
	1669		Anhydrite and red bed
	2700		Anhydrite and salt
	2843		Anhydrite
	2894		Anhydrite and salt streaks
	3067		Anhydrite
	3107		Anhydrite and lime
	3138		Lime
	3189		Anhydrite and lime
	3209		Lime
	3241		Sand streaks and lime
	3343		Lime and sand streaks
	3385		Lime and sand streaks
	3521		Lime
	3523		Lime and junk
	3600		Lime
			<u>FORMATION TOPS</u>
			Anhydrite 1560
			Base salt 2990
			Brown lime 3020
			Gas pay 3185 to 3590