


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

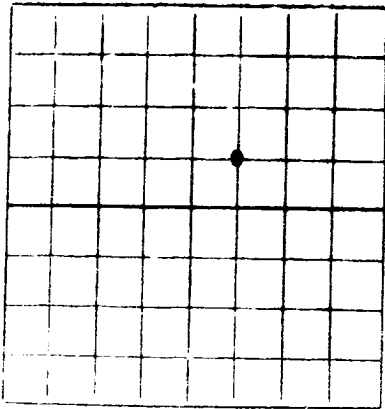

AREA 640 ACRES  
LOCATE WELL CORRECTLY

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPPLICATE. If State Land submit 6 Copies

Albert Gackie, Operator  
(Company or Operator)  
Sinclair State "B"  
(Lease)  
Well No. 11, in SW 1/4 of NE 1/4, of Sec. 3, T. 23 S., R. 36 E., NMPM.  
Langlie Mattix Pool, Lea County.  
Well is 1980 feet from North line and 1980 feet from East line  
of Section 3. If State Land the Oil and Gas Lease No. is B-1506.  
Drilling Commenced 9-2, 1960. Drilling was Completed 9-11, 1960.  
Name of Drilling Contractor Gackie Drilling Company, Inc.  
Address P. O. Box 2076, Hobbs, New Mexico.  
Elevation above sea level at Top of Tubing Head 3483. The information given is to be kept confidential until 19.

OIL SANDS OR ZONES

No. 1, from 3686 to 3770 No. 4, from to  
No. 2, from to No. 5, from to  
No. 3, from to No. 6, from to

IMPORTANT WATER BANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.  
No. 2, from to feet.  
No. 3, from to feet.  
No. 4, from to feet.

CASING RECORD

| SIZE  | WEIGHT PER FOOT | NEW OR USED | AMOUNT | KIND OF SHOE | CUT AND PULLED FROM | PERFORATIONS     | PURPOSE            |
|-------|-----------------|-------------|--------|--------------|---------------------|------------------|--------------------|
| 8 5/8 | 24#             | New         | 299    | TP           |                     |                  |                    |
| 4 1/2 | 9.5#            | New         | 3843   | TP           |                     | 3686 - 3718      | Surface Production |
|       |                 |             |        |              |                     | 3726 - 30.       |                    |
|       |                 |             |        |              |                     | 36 - 44, 48 - 54 |                    |
|       |                 |             |        |              |                     | 64 - 70          |                    |

MUDDING AND CEMENTING RECORD

| SIZE OF HOLE | SIZE OF CASING | WHERE SET | NO. BAGS OF CEMENT | METHOD USED | MUD GRAVITY | AMOUNT OF MUD USED |
|--------------|----------------|-----------|--------------------|-------------|-------------|--------------------|
| 11           | 8 5/8          | 309       | 200                | P & P       |             |                    |
| 6 3/4        | 4 1/2          | 3851      | 1210               | P & P       |             |                    |
|              |                |           |                    |             |             |                    |
|              |                |           |                    |             |             |                    |

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

Sandfraced & acidized in 2 stages. 500 gals Spearhead Acid, 20,000 gals lease oil with 27,250# sd. using 50 ball sealers. Broke @ 2900. Treated @ 2200# @ 26 BPM.

Result of Production Stimulation

Depth Cleaned Out 3825