


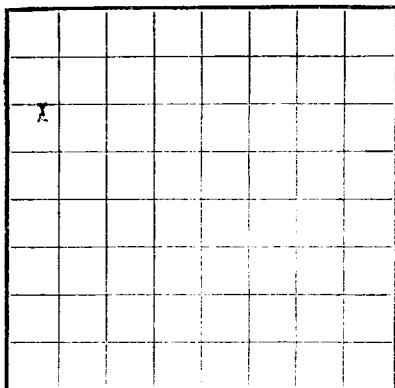

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

LOG OF OIL OR GAS WELL

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Signed

Date July 11, 1961

Title District Superintendent

The summary on this page is for the condition of the well at above date.

Commenced drilling _____, 19____ Finished drilling _____, 19____

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

No. 1, from _____ to _____ No. 4, from _____ to _____

No. 2, from _____ to _____ No. 5, from _____ to _____

No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from _____ to _____ No. 3, from _____ to _____

No. 2, from _____ to _____ No. 4, from _____ to _____

CASING RECORD

[illegible]

MUDDING AND CEMENTING RECORD

[illegible]

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth set

Adapters—Material	Size
-------------------	------

SHOOTING RECORD

[illegible]

TOOLS USED

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet.

Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet.

DATES

-----, 19----- Put to producing -----, 19-----

The production for the first 24 hours was _____ barrels of fluid of which _____ % was oil: _____ %

emulsion: ----- % water; and ----- % sediment. Gravity, °Bé. -----

If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____

Rock pressure, lbs. per sq. in. _____

EMPLOYEES

_____, Driller _____, Driller

_____, Driller _____, Driller

FORMATION RECORD

FROM—	TO—	TOTAL FEET	FORMATION
This well was drilled to a TD of 3805' DGL 3790', KB 10' Elev. 3499' and completed as a dry hole on 12-13-57 and was abandoned but not plugged. Cut and pulled 5 1/2" Csg at 1565'. Set cement plugs at 3596-396' 4/25 sxs, 1595 to 1495' 4/30 sxs, 375 to 275 4/35 sxs, 10 sxs at surface. Used 10# mud between plugs. Erected 4" marker extending 4' above surface w/well name & location inscribed thereon. Loc restored original condition. Plugging started 5-24-61 and completed 5-26-61.			

(OVER)

18-45094-4

