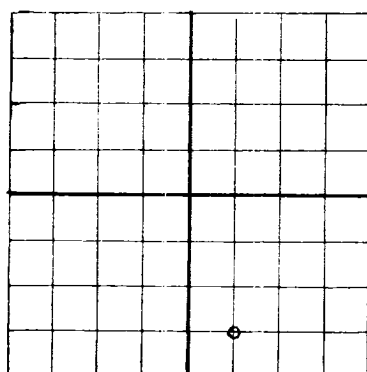


N

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

AREA 640 ACRES
LOCATE WELL CORRECTLY

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Texas Pacific Coal and Oil Company, P. O. Box 2110, Fort Worth 1, Texas

Company or Operator

Address

State "A" Ac. 1

Well No. 12

in SE 1/4

of Sec. 9

T. 23

S. 23

Lease

R. 36-E

N. M. P. M.

Lynn

Field,

Lea

County.

Well is 660 feet North South of the North line and 1980 feet west of the East line of Section 9

If State land the oil and gas lease is No. 2A Assignment No. A-983

If patented land the owner is Address

If Government land the permittee is Address

The Lessee is Address

Drilling commenced March 18, 1944 Drilling was completed April 12, 1944

Name of drilling contractor Texas Pacific Coal and Oil Co. Address P. O. Box 2110, Fort Worth 1, Texas

Elevation above sea level at top of casing 3472 feet.

The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from none to No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from none to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
10"	40#			341			3700	3725	
7-5/8"	26#			2965			3630	3666	
5 1/2"	14#			3727			3576	3600	
2"	4.7#			3505			3520	3566	
							3491	3515	

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
10"		341	150	Chemical Process		
7-5/8"		2980	150	"		
5 1/2"		3743	125	"		

PLUGS AND ADAPTERS

Heaving plug--Material Length Depth Set

Adapters--Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Chemical	2,000	4-16-44		
		"	2,000	4-20-44		
		"	2,000	4-26-44		
		"	2,000	4-29-44		
		"	2,000	5-4-44		

Results of shooting or chemical treatment 5,780 M. C. F. Gas

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 3750 feet, and from feet to feet

Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing 19

The production of the first 24 hours was barrels of fluid of which % was oil; %

emulsion; % water; and % sediment. Gravity, Ba

If gas well, cu. ft. per 24 hours 5,780 Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

J. R. Teague, Kermit, Texas Driller Driller

Driller Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 22nd

Fort Worth, Texas

May 22, 1944

Place

Date

day of

1

May

1944

Name

J. R. Teague

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	50	50	Caliche
50	248	198	Red Bed & Sand
248	303	55	Red Bed
303	466	163	Red Bed & Shells
466	561	95	Red Bed
561	790	219	Red Bed & Shells
790	846	56	Red Rock
846	1099	253	Red Bed & Shells
1099	1174	75	Red Rock
1174	1348	174	Red Rock & Shells
1348	1350	2	Red Rock
1350	1490	140	Anhydrite
1490	1501	11	Anhydrite & Salt
1501	1535	34	Anhydrite
1535	1750	215	Anhydrite & Salt
1750	1781	31	Anhydrite
1781	2678	896	Anhydrite & Salt
2678	2752	74	Anhydrite
2752	2770	18	Anhydrite & Salt
2770	2815	45	Anhydrite
2815	2855	40	Anhydrite & Salt
2855	2980	125	Anhydrite, Salt, Shells
2980	3010	30	Anhydrite
3010	3025	15	Lime
3025	3039	14	Anhydrite & Lime
3039	3075	36	Lime
3075	3102	27	Anhydrite & Lime
3102	3158	56	Lime
3158	3179	21	Lime (G & B)
3179	3223	44	Sandy Lime
3223	3341	118	Lime
3341	3420	79	Lime (G & B)
3420	3750	330	Lime (G)

TOTAL DEPTH: 3750'