


N.


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

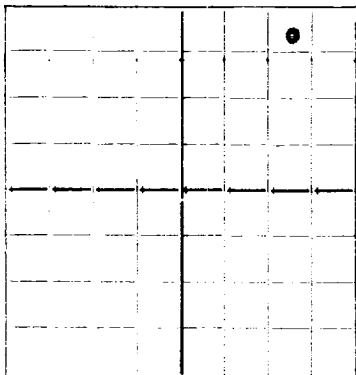

DUPLICATE

WELL RECORD



Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Gulf Oil Corporation

Tulsa, Oklahoma

Company or Operator

Address

J.F.Janda E

Well No.

2

in

NW NE NE

of Sec.

21

T.

23S

Lease

R. 36E

N. M. P. M.

Lynn

Field,

Lea

County.

Well is 330

feet south of the North line and

990

feet west of the East line of

NW NE NE

If State land the oil and gas lease is No. B-229

Assignment No.

If patented land the owner is

Address

If Government land the permittee is

Address

The Lessee is

Gulf Oil Corporation

Address

Tulsa, Oklahoma

Drilling commenced

12-30-

19 37

Drilling was completed

1-28-38

19

Name of drilling contractor

Loffland Brothers

Address

Tulsa, Oklahoma

Elevation above sea level at top of casing

feet.

The information given is to be kept confidential until

1

19

OIL SANDS OR ZONES

No. 1, from

3150'

to

3650'

No. 4, from

to

No. 2, from

to

No. 5, from

to

No. 3, from

to

No. 6, from

to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from

Rotary hole

to

feet.

No. 2, from

to

feet.

No. 3, from

to

feet.

No. 4, from

to

feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
10-3/4"	32.75	8	SC LW	301'				
7-5/8	26.4	8	SC LW	2969				
5-1/2	17	10	SC LW	3548				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
13-3/4	10-3/4	301'	300	Halliburton	Used 600# of calcium chloride	
9-7/8	7-5/8	2969	350	Halliburton		
6-3/4	5-1/2	3548	75	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material

Length

Depth Set

Adapters—Material

Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0' feet to 3690' feet, and from feet to feet

Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing February 1, 19 38

The production of the first 24 hours was 1652 barrels of fluid of which % was oil; %

emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours 1,195,592 Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

Driller Driller

Driller Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 16

Tulsa, Oklahoma

Tulsa, Feb. 16, 1938

day of February, 1938

Name

Position General Superintendent

## FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0'	185'		Sand
	260		Sand & shells
	570		Red bed
	639		Red rock & shells
	669		Sandstone
	759		Red bed & gyp
	825		Gray sand
	1134		Red rock
	1272		Red rock & shells
	1308		Red rock
	1311		Red rock & anhydrite
	1488		Anhydrite
	1545		Red rock & gyp
	1548		Anhydrite
	1755		Salt & shells
	1880		Salt & anhydrite
	1882		Shale & anhydrite
	1883		Anhydrite
	2130		Salt & anhydrite
	2177		Salt & shells
	2189		Anhydrite
	2400		Salt & anhydrite
	2483		Anhydrite, brown shale & salt
	2668		Salt & anhydrite
	2696		Salt
	2737		Salt & anhydrite
	2791		Anhydrite
	2837		Salt & shells
	2850		Anhydrite
	2872		Soft gray lime
	2916		Lime & anhydrite
	2950		Anhydrite
	2973		Anhydrite & lime
Total depth	3690		Lime

Formation tops

Anhydrite	1280'
Salt base	2905
Pay	3665