
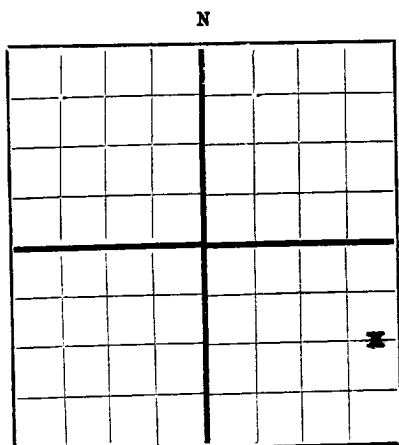


DUPLICATE

FORM C-105

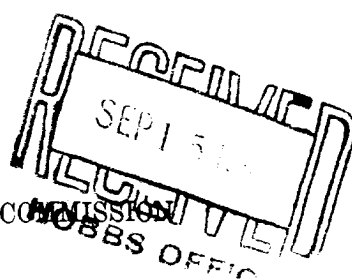

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

AREA 640 ACRES
LOCATE WELL CORRECTLY

R. G. Clay

Hobbs, New Mexico

Sinclair State Company or Operator 1 SE 1/4 23 23S
Well No. in of Sec. T.
Lease Langlie-Mattix Lea
R. 1650 N. North M. South Field, Section 23 County.
Well is feet south of the North line and feet west of the East line of
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is Address
If Government land the permittee is Address Fort Worth, Texas
The Lessee is 7/23/49 Address 8/12/49
Drilling commenced Clay & Gackie Contracting Co. Drilling was completed Hobbs, New Mexico
Name of drilling contractor Address
Elevation above sea level at top of casing feet.
The information given is to be kept confidential until 19

2990

3300 OIL SANDS OR ZONES

No. 1, from to No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
10 3/4"	32.75	8	Natl.	225	Guide				
7 5/8"	26.	8	Natl.	1235	Guide				
5 1/2"	14.	8	Natl.	2770	Guide & Float				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 3300 feet, and from feet to feet
Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing 8/21 49
The production of the first 24 hours was barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be.
If gas well, cu. ft. per 24 hours 15 MCF Gallons gasoline per 1,000 cu. ft. of gas.
Rock pressure, lbs. per sq. in. 1300#

EMPLOYEES

Driller Driller
Driller Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this Hobbs, New Mexico 9/15/49
day of September 1949 Name Partner
Position Partner

