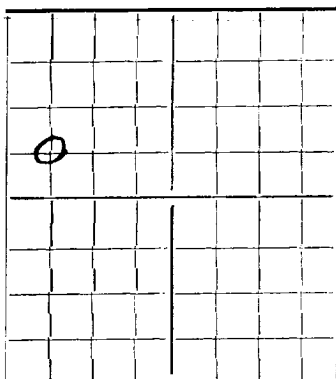



N.

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD



Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE

The Ohio Oil Company

Hobbs, New Mexico

Company or Operator

Address

Walter Lynch

Well No. 2

1/4 of NW 1/4

of Sec. 1

T. 22S

R. 37E

N. M. P. M. Paddock

Field, Lea

County.

Well is 1980 feet south of the North line and 4620 feet west of the East line of

If State land the oil and gas lease is No.

Assignment No.

If patented land the owner is Walter Lynch

Address Box 769 - Midland, Texas

If Government land the permittee is

Address

The Lessee is

Address

Drilling commenced December 26, 1945

Drilling was completed January 30, 1946

Name of drilling contractor Eastland Oil Company

Address 1401 Ft. Worth Nat'l Bank Bldg.,

Ft. Worth, Texas.

Elevation above sea level at top of casing 3394 feet.

The information given is to be kept confidential until

19

OIL SANDS OR ZONES

No. 1, from to No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
13-3/8	48	8 rd	Sals	304'9"				Cem. W/ 300
8-5/8	28	8 rd	Sals	2865'6"	HOW CO.			2500
5-1/2	17	8 rd	Sals	5180'	Baker Triplex			300

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17 1/2	13-3/8	313	300	Halliburton		
11	8-5/8	2850	2500	"		
8	5-1/2	5133	300	"		
	2-3/8	5187				

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Acidized	500 Mud	2-5-46	5133-5207	
		"	4000 Reg.	2-6-46	5133-5207	

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 5207 feet, and from feet to feet

Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing February 5, 1946

The production of the first 24 hours was 676 barrels of fluid of which 100 % was oil; % emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

B. F. White

, Driller

J. B. Burke

, Driller

I. H. Cook

, Driller

, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Hobbs, New Mexico

March 7, 1946

Subscribed and sworn to before me this 7th

day of March, 1946

Name

Position

District Foreman

Notary Public.

Representing

The Ohio Oil Company

Company or Operator

My Commission expires

MY COMMISSION EXPIRES AUG. 19, 1947

Address Box 1607 - Hobbs, New Mexico

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	40	40	Caliche
40	90	50	"
90	200	110	Red Bed
200	280	80	Red bed & sand
280	562	282	Red bed
562	832	270	Red bed & sand
832	1180	348	Red Bed
1180	1191	11	Anhydrite
1191	1330	139	Anhydrite & shale
1330	1420	90	Anhydrite & salt
1420	1520	100	Shale, Anhydrite & saltstreaks
1520	1657	137	Anhydrite, shale & salt
1657	2408	751	Anhydrite & salt
2408	2521	113	Anhydrite
2521	2554	33	Anhydrite & Gyp
2554	2587	33	Anhydrite
2587	2633	46	Anhydrite & shale
2633	2760	127	Anhydrite
2760	2772	12	Shale
2772	2859	87	Anhydrite
2859	2915	56	Anhydrite & shale
2915	2975	60	Anhydrite & sand
2975	3020	55	Shale & lime
3020	3083	63	Sandy lime
3083	3335	252	Sand & shale
3335	3485	150	Anhydrite & shale
3485	3545	60	Anhydrite, shale & lime
3545	3575	30	Sand & lime
3575	3637	62	Anhydrite, shale & lime
3637	3662	25	Anhydrite & lime
3662	3835	173	Lime
3835	3892	57	Lime & shale
3892	4512	620	Oil Show
4512	4537	25	Sand, Lime & shale
4537	4940	403	Lime
4940	5056	116	Brown Lime
5056	5207	151	Lime
	5207		Lime & shale
			T.D.