


DEC 2 1947

FORM C-105

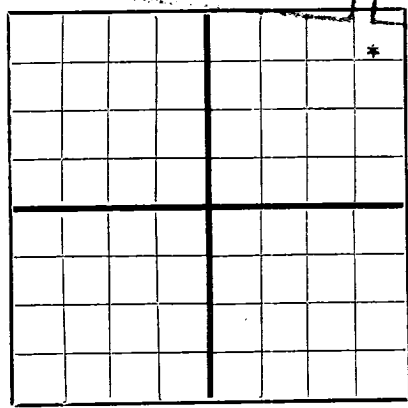

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Gulf Oil Corporation Hobbs, New Mexico
Company or Operator Address
Mark Well No. 6 in NE NE of Sec. 3, T. 22S
Lease
R. 37E, N. M. P. M. Paddock Field, Lea County.
Well is 554 feet south of the North line and 554 feet west of the East line of Section 3
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is Mr. Mark Owen Address Eunice, New Mexico
If Government land the permittee is Address
The Lessee is Gulf Oil Corporation Address Tulsa, Oklahoma
Drilling commenced 10-10-47 19 Drilling was completed 11-19-47 19
Name of drilling contractor Parker Drilling Co. Address Monahans, Texas
Elevation above sea level at top of casing 3399 feet.
The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from to No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.
No. 1, from to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
13 3/8	48	8 R.T.	SS	281'					
9 5/8	36	8 R.T.	SS	2886'					
7"	23	8 R.T.	SS	5228					

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
17 1/2	13 3/8	297	300	HO-60		
12 1/4	9 5/8	2800	1300	"		
8 3/4	7"	5240	500	"		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 5240 feet, and from feet to feet
Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing 11-20 19 47
The production of the first 24 hours was 245 barrels of fluid of which 100% was oil;
emulsion; % water; and % sediment. Gravity, Be.
If gas well, cu. ft. per 24 hours. Gallons gasoline per 1,000 cu. ft. of gas.
Rock pressure, lbs. per sq. in.

EMPLOYEES

Parker Drilling Co. Driller Driller
Driller Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 19th day of Dec 1947
Notary Public
My Commission expires 10-24-49
Hobbs, New Mexico 12-18-47
Name E. J. Gallagher
Position District Superintendent
Representing Gulf Oil Corporation - GYPROD
Address Box 1667 - Hobbs, New Mexico

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	35		Caliche
35	37		Red Bed
37	300		Red Bed
300	725		Red Bed and Shells
725	1148		Red Bed
1148	1232		Red Rock and Shales
1232	1250		Red bed and Shells
1250	1985		Anhydrite and Salt
1985	2158		Anhydrite, Potash and Salt Stks.
2158	2388		Anhydrite and Salt
2388	2459		Anhydrite and Gyp.
2459	2506		Anhydrite, Gyp and Lime
2506	2581		Anhydrite and Gyp
2581	2624		Anhydrite, Gyp and Lime
2624	2700		Anhydrite and Gyp
2700	2749		Anhydrite, Gyp and Lime
2749	2870		Anhydrite and Gyp
2870	2901		Lime and Anhydrite
2901	2997		Sandy Lime
2997	3029		Lime
3029	4951		Lime
4951	5120		Lime
5120	5195		Dolomite
5195	5205		Lime
5205	5237		Lime
5237	5240		Dolomite
			<u>Formation Tops:</u>
			Anhydrite 1150
			Base Salt 2390
			Brown Lime 2620
			White Lime 3870
			Oil Pay 5080'