

## NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

## NOTICE OF INTENTION TO DRILL

Notice must be given to the Oil Conservation Commission or its proper agent and approval obtained before drilling begins. If changes in the proposed plan are considered advisable, a copy of this notice showing such changes will be returned to the sender. Submit this notice in triplicate. One copy will be returned following approval. See additional instructions in Rules and Regulations of the Commission.

Hobbs, New MexicoMarch 20, 1937

OIL CONSERVATION COMMISSION,  
Santa Fe, New Mexico

Place

Date

Gentlemen:

You are hereby notified that it is our intention to commence the drilling of a well to be known as \_\_\_\_\_

Skelly Oil CompanyE. A. SticherWell No. 1 in CNE/4, SW/4

Company or Operator

Lease

of Sec. 4, T. 22, R. 37, N. M. P. M., South Eunice Field, Lea County.

N.

The well is 1980' feet [N.] ~~SW~~ of the South line and 1980' feet

[E.] ~~SW~~ of the West line of Section 4

(Give location from section or other legal subdivision lines. Crossout wrong directions.)

If state land the oil and gas lease is No. \_\_\_\_\_ Assignment No. \_\_\_\_\_

If patented land the owner is E. A. Sticher


Address Eunice, New Mexico

If government land the permittee is \_\_\_\_\_

Address \_\_\_\_\_

The lessee is Skelly Oil Company

Address Tulsa, Okla.

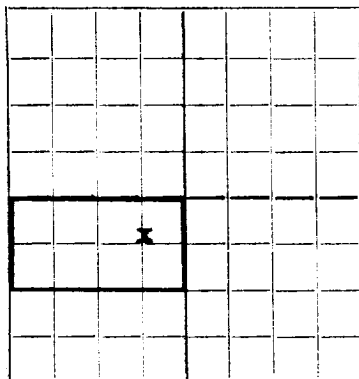

AREA 640 ACRES  
LOCATE WELL CORRECTLY

We propose to drill well with drilling equipment as follows: \_\_\_\_\_

Rotary tools to approximately 3600' and drill in with cable tools

The status of a bond for this well in conformance with Rule 39 of the General Rules and Regulations of the Commission is as follows: \_\_\_\_\_

We propose to use the following strings of casing and to land or cement them as indicated:

Size of Hole	Size of Casing	Weight Per Foot	New or Second Hand	Depth	Landed or Cemented	Sacks Cement
12-1/2"	10-3/4"	40 $\frac{1}{4}$	SH	160'	Cemented	100
8-1/2"	7" OD	22 $\frac{1}{4}$	New	3600'	Cemented	400

If changes in the above plan become advisable we will notify you before cementing or landing casing. We estimate that the first productive oil or gas sand should occur at a depth of about 3720' feet.

Additional information: The 7"OD casing will be set by Halliburton Two Stage Cement Tool with 200 sacks cement being displaced at approximately 1400' and 200 sacks being displaced at bottom of 7"OD casing which will be set at approximately 3600'.

Approved \_\_\_\_\_ 19\_\_\_\_  
except as follows:

Sincerely yours,

Skelly Oil Company

Company or Operator

By \_\_\_\_\_

Position Dist. Superintendent

Send communication regarding well to

Name Skelly Oil CompanyAddress Hobbs, New Mexico

OIL CONSERVATION COMMISSION,

By \_\_\_\_\_

Title \_\_\_\_\_