


## OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

## MISCELLANEOUS REPORTS ON WELLS

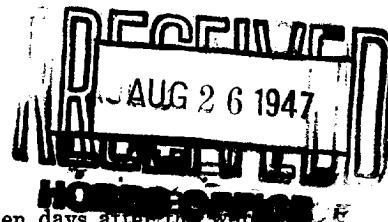

Submit this report in triplicate to the Oil Conservation Commission or its proper agent within ten days after the work specified is completed. It should be signed and sworn to before a notary public for reports on beginning drilling operations, results of shooting well, results of test of casing shut off, result of plugging of well, and other important operations, even though the work was witnessed by an agent of the Commission. Reports on minor operations need not be signed and sworn to before a notary public. See additional instructions in the Rules and Regulations of the Commission.

Indicate nature of report by checking below.

|  |  |  |   |
|--|--|--|---|
| REPORT ON BEGINNING DRILLING OPERATIONS                    |  | REPORT ON REPAIRING WELL                       |   |
| REPORT ON RESULT OF SHOOTING OR CHEMICAL TREATMENT OF WELL |  | REPORT ON PULLING OR OTHERWISE ALTERING CASING |   |
| REPORT ON RESULT OF TEST OF CASING SHUT-OFF                |  | REPORT ON DEEPENING WELL                       |   |
| REPORT ON RESULT OF PLUGGING OF WELL                       |  | Report on Plug Back                            | X |

August 25, 1947

Hobbs, New Mexico

Date

Place

OIL CONSERVATION COMMISSION,  
SANTA FE, NEW MEXICO.

Gentlemen:

Following is a report on the work done and the results obtained under the heading noted above at the \_\_\_\_\_

Gulf Oil Corporation

Baker

Well No. 3 in the \_\_\_\_\_

Company or Operator

Lease

NE SE

of Sec. 5

T. 22S

R. 37E

N. M. P. M.,

Brunson

Field,

Lea

County.

The dates of this work were as follows: Started August 21, 1947; Completed August 25, 1947

Notice of intention to do the work was ~~(was not)~~ submitted on Form C-102 on August 20, 1947

and approval of the proposed plan was ~~(was not)~~ obtained. (Cross out incorrect words.)

## DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

Ran and set Lane Wells drillable bridge plug at 7750' and pumped 6 sacks of Neat Cement on top of plug. Found top of cement at 7704' as per steel line measurement. Perforated 7" casing from 7320' to 7355' with six 15/32" holes per ft. by Lane Wells. Attempted to acidize with 1000 gallons by Chemical Process but formation would not allow acid to be injected into it at 3000 PSI for 1 hour and 15 minutes.

Witnessed by N. B. Jordan

Gulf Oil Corporation

Foreman

Name

Company

Title

Subscribed and sworn before me this \_\_\_\_\_

I hereby swear or affirm that the information given above is true and correct.

26<sup>th</sup> day of August, 1947

Name E. J. Gallagher

Position District Sup't.

Representing Gulf Oil Corporation  
Company or Operator

My commission expires Oct. 24, 1949

Address Box 1607, Hobbs, New Mexico

Remarks:

APPROVED

Date AUG 26 1947

Roy [Signature]  
Name  
Oil & Gas Inspector  
Title

Jefferson Hall