


## NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

## WELL RECORD

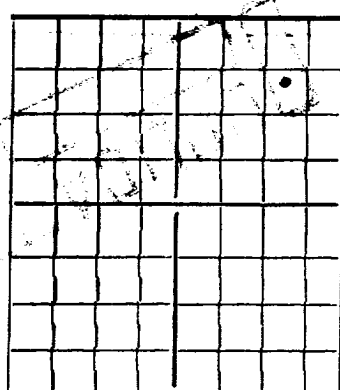

AREA 640 ACRES  
LOCATE WELL CORRECTLY

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Neville G. Penrose, Inc.

1815 Fair Bldg - Fort Worth, Texas

Company or Operator

Address

Grizzell

Well No.

1

in

SW/4 NE/4

of Sec.

5

T.

22-S

Lease

R. 37-E

N. M. P. M.

Drinkard

Field,

Lee

County.

Well is 1760 feet south of the North line and 1760 feet west of the East line of Sec. 5

If State land the oil and gas lease is No. Assignment No.

If patented land the owner is Earl Grizzell, Address Roswell, New Mexico

If Government land the permittee is, Address

The Lessee is, Address

Drilling commenced August 16, 1950 Drilling was completed Oct. 25, 1950

Name of drilling contractor Mekin Drilling Company, Address Hobbs, New Mexico

Elevation above sea level at top of casing 3447 DF feet.

The information given is to be kept confidential until 19

## OIL SANDS OR ZONES

No. 1, from 6488 to 6508 No. 4, from to

No. 2, from 6514 to 6530 No. 5, from to

No. 3, from 6540 to 6549 No. 6, from to

## IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

## CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
13-3/8"	48#		Spang	161				Surface
8-5/8"	28#		"	2947				Middle String
5-1/2"	15.50#		"	6488				Oil String

## MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17 1/2"	13-3/8"	161	160	Halliburton		
11"	8-5/8"	2947	1500	"		
7-7/8"	5-1/2"	6488	300	"		

## PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

## RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Acid	2,000Gal	10-29-50		
		"	6,000 "	10-30-50		

Results of shooting or chemical treatment After second stage treatment well flowed 16

bbls per hour and on Nov. 10 flowed 104 bbls. in 10 hours before shut in

## RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

## TOOLS USED

Rotary tools were used from 0 feet to 6549 feet, and from feet to feet

Cable tools were used from feet to feet, and from feet to feet

## PRODUCTION

Put to producing Nov. 10th., 1950

The production of the first 24 hours was 249 barrels of fluid of which 100 % was oil; 0 %

emulsion; 0 % water; and 0 % sediment. Gravity, Be 38

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

## EMPLOYEES

Ray McDonald, Driller R. M. Cooper, Driller

J. W. Wright, Driller R. O. Rudder, Driller

## FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Fort Worth, Texas

Nov. 14, 1950

Subscribed and sworn to before me this 14th

day of November, 1950

Name

Position Supt.

ANNABEL L. COY, Notary Public  
In And For Tarrant County, Texas

Notary Public.

Representing Neville G. Penrose, Inc.  
Company or Operator

My Commission expires 11/15/51

Address 1815 Fair Bldg., Fort Worth, Texas

## FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	2250		Red Beds and Salt
2250	2570		Red Beds
2570	2720		Sand & Shale
2720	3530		Dolomite & Anhydrite
3530	3610		Sand
3610	3940		Dolomite
3940	5100		Dolomite
5100	5560		Dolomite and Sand
5560	6050		Dolomite
6050	6200		Dolomite and Sand
6200	6480		Dolomite
6480	6549		Limestone & Dolomite