
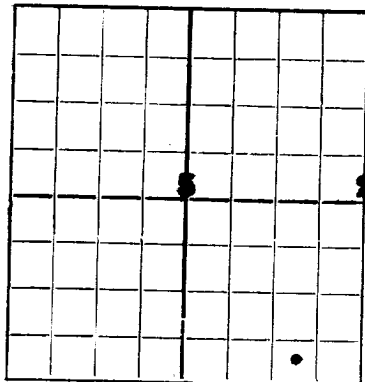


N.

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

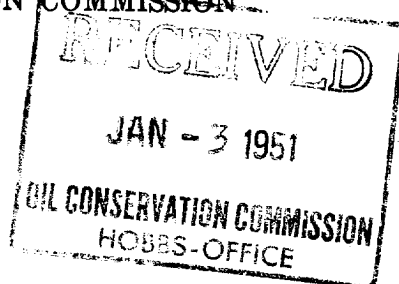

AREA 640 ACRES
LOCATE WELL CORRECTLY

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Neville G. Penrose Inc.

G.W. Grissell

Well No. **2** in **SE/4** of Sec. **5**, T. **22-S**

R. **37 E**, N. M. P. M., **Drinkard** Field, **Lea**, County.

Well is **440** feet **South** of the **North** line and **880** feet west of the East line of **Sec. 5**

If State land the oil and gas lease is No. _____ Assignment No. _____

If patented land the owner is **J.W. Grissell**, Address **Kunice, New Mexico**

If Government land the permittee is _____, Address _____

The Lessee is **Gulf Oil Corp.**, Address _____

Drilling commenced **Nov. 13 th.** 19**50** Drilling was completed **DEC. 18 th.** 19**50**

Name of drilling contractor **Makin Drlg. Co.**, Address **Hobbs, New Mexico.**

Elevation above sea level at top of casing **3624** feet.

The information given is to be kept confidential until **Not Confidential.** 19____

OIL SANDS OR ZONES

No. 1, from **5046** to **5122** No. 4, from _____ to _____

No. 2, from **5074** to **5082** No. 5, from _____ to _____

No. 3, from **6483** to **6540** No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from **120** to **140** feet.

No. 2, from _____ to _____ feet.

No. 3, from _____ to _____ feet.

No. 4, from _____ to _____ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED TO	PURPOSE
13 3/8	46#	8	Spang	165	Larkin			
8 5/8"	32#	8	Spang	2900	Larkin			
5 1/2"	15.50#	8	Spang	6483	Larkin			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17 1/2"	13 3/8"	165'	150			
11 3/4"	8 5/8"	2900'	1500			
7 7/8"	5 1/2"	6483'	400			

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____

Adapters—Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		15# Reg. Low Tension.	500 Gal.	12-22-50	6486-6540'	

Results of shooting or chemical treatment **Flowed 14 B.O.P.H 1st. 6hrs. after cleaning up following treatment. 1/2" choke- G.O.R. 1000:1**

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from **0** feet to **6540** feet, and from _____ feet to _____ feet.

Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet.

PRODUCTION

Put to producing **12-22-1950**, 19____

The production of the first 24 hours was **246** barrels of fluid of which **100** % was oil; **0** %

emulsion; **0** % water; and **0** % sediment. Gravity, Be **37.4**

If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____

Rock pressure, lbs. per sq. in. _____

EMPLOYEES

Makin Drlg. Co., Driller _____, Driller _____

_____, Driller _____, Driller _____

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this **29** **Kunice New Mex.** **12-29-50**

day of **December** 19**50** Name **Tom Martin**

Position **Prod. Supt.**

Representing **Neville G. Penrose Inc.** Company or Operator.

My Commission expires **Feb. 8-1951** Address **1818 N. Lincoln St. Hobbs N.M.**

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
SFC	1110	1110	Red bed
1110	1270	160	Anhydrite
1270	1340	70	Sand
1340	1560	220	Red beds and anhydrite
1560	2520	960	Salt and anhydrite
2520	2670	150	Anhydrite
2670	2805	135	Dolomite and anhydrite
2805	3410	605	Dolomite
3410	3560	150	Sand and dolomite
3560	3860	300	Dolomite
3860	3890	30	Sandy dolomite
3890	5060	1170	Dolomite
5060	5100	40	Sand and dolomite
5100	5330	230	Dolomite
5330	5470	140	Sand and dolomite
5470	5980	510	Dolomite
5980	6160	180	Sandy dolomite
6160	6430	270	Dolomite
6430	6540	110	Limestone and dolomite
.....
6483	6508	25	Oil Pay
6518	6540	22	Oil Pay