


## OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

## MISCELLANEOUS REPORTS ON WELLS

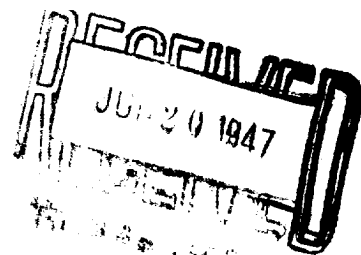

Submit this report in triplicate to the Oil Conservation Commission or its proper agent within ten days after the work specified is completed. It should be signed and sworn to before a notary public for reports on beginning drilling operations, results of shooting well, results of test of casing shut off, result of plugging of well, and other important operations, even though the work was witnessed by an agent of the Commission. Reports on minor operations need not be signed and sworn to before a notary public. See additional instructions in the Rules and Regulations of the Commission.

Indicate nature of report by checking below.

REPORT ON BEGINNING DRILLING OPERATIONS		REPORT ON REPAIRING WELL	<b>X</b>
REPORT ON RESULT OF SHOOTING OR CHEMICAL TREATMENT OF WELL		REPORT ON PULLING OR OTHERWISE ALTERING CASING	
REPORT ON RESULT OF TEST OF CASING SHUT-OFF		REPORT ON DEEPENING WELL	
REPORT ON RESULT OF PLUGGING OF WELL			

June 13, 1947

Hobbs, New Mexico

Date

Place

OIL CONSERVATION COMMISSION,  
SANTA FE, NEW MEXICO.

Gentlemen:

Following is a report on the work done and the results obtained under the heading noted above at the  
**STANOLIND OIL & GAS CO.** **L. E. GRIZZELL "B"** Well No. **2** in the

Company or Operator **NE/4** of Sec. **8**, T. **22-S**, R. **37-E**, N. M. P. M.,  
**PADDOCK** Field, **LEA** County.

COMPLETED June 11, 1947

The dates of this work were as follows:

Notice of intention to do the work was (~~was not~~) submitted on Form C-102 on **April 10** 19**47**  
and approval of the proposed plan was (~~was not~~) obtained. (Cross out incorrect words.)

DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

See Reverse Side

Witnessed by **R. L. Gray** **STANOLIND OIL & GAS CO.** **Field Engineer**

Name	Company	Title
------	---------	-------

Subscribed and sworn before me this **17**

I hereby swear or affirm that the information given above is true and correct.

day of **June**, 19**47**Name **Joseph Henderson**Position **Field Superintendent**Representing **STANOLIND OIL & GAS COMPANY**

Company or Operator

My commission expires **2-23-47**Address **Box F; Hobbs, New Mexico**

Remarks:

**APPROVED**  
**JUN 20 1947**

Date

**Roy Yarbrough**  
Name  
**Oil & Gas Inspector**  
Title

DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

TD 5260 5" casing set at 5260, Perforated 5228-60 (zone 3). Well swabbed 60 BO / 20 BW PD but would not flow. To shut off water, a bridging plug was set at 5213 and cement placed to 5202. Then perforated 5" casing. 5166-85 (zone 2). Well swabbed 95% water indicating communication behind pipe between zones 2 and 3. Well was cleaned out to bottom and 50 sacks of cement circulated below retainer set at 5208. Cement shut off upper perforations, so pipe was reperforated 5166-80 with 4 shots per foot. Subsequent testing still indicated water being produced. Retainer was then set at 5126 and 22 sacks of cement were squeezed thru perforations 5166-80 under 3000 psi. Section from 5166-78 was reperforated with 4 shots per foot after drilling out to 5182. No fluid entered hole after acidizing with 500 gallons. After reacidizing with 2000 gallons well flowed 131 BO / 2 BW in 24 hrs. GOR 839 and was completed June 11, 1947. Workover was successful.