

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS


(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☒ gas ☐ other ☐
well well
2. NAME OF OPERATOR
TEXACO Inc.
3. ADDRESS OF OPERATOR
P.O. Box 728, Hobbs, New Mexico 88240
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 1980' FSL & 1980' FWL
AT TOP PROD. INTERVAL: (Unit Letter 'K')
AT TOTAL DEPTH:
15. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO: SUBSEQUENT REPORT OF:
TEST WATER SHUT-OFF ☐ ☐
FRACTURE TREAT ☐ ☐
SHOOT OR ACIDIZE ☐ ☐
REPAIR WELL ☐ ☐
PULL OR ALTER CASING ☐ ☐
MULTIPLE COMPLETE ☐ ☐
CHANGE ZONES ☐ ☐
ABANDON* ☐ ☐
(other) OF: Abandon Eumont & Addl. Drinkard Perfs.

583249E
LC-033706 (b)
6. IF INDIAN, ALLOTTEE OR TRIBE NAME
-
7. UNIT AGREEMENT NAME
-
8. FARM OR LEASE NAME
C.P. Falby 'B' Federal
9. WELL NO.
1
10. FIELD OR WILDCAT NAME
Drinkard
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec. 8, T-22-S, R-37-E
12. COUNTY OR PARISH
Lea
13. STATE
New Mexico
14. API NO.
15. ELEVATIONS (SHOW DF, KDB, AND WD)
3422' (DF)

(NOTE: Report results of multiple completions or zone change on Form 9-330.)

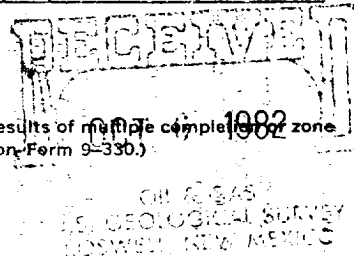

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*
1. Rigged up. Install BOP. Pull tubing from Eumont & Drinkard Strings.
 2. Set RBP @ 6372' & spot 2 Sx. Sand on plug.
 3. Locate Csg leak @ 3697'. Spor Hydromite & Cal-Seal on leak. Tested 4 1/2" Csg liner @/2000# for 30 minutes, 8:45-9:15 AM, 6-15-82. Tested OK.
 4. Set Cement retainer @ 3416'. Squeeze Eumont perfs. 3471'-3489' W/200 Sx. Class "C" Cement. WCC.DOC. Tested cement job to 1000# for 30 minutes, 10:30-11:00 AM, 6-18-82. Tested OK. Eumont Zone P&A, 6-18-82.
 5. Pull RBP @ 6372'.
 6. Perforate 4 1/2" Csg Liner W/2-JSPF @ 6327', 46,50,59,61,63,75,87,92,6410',17,21,24,28,49,52,61,6478'.
 7. Set pkr @ 6245' Acidize perfs. 6327'-6538' W/3000 gals. 20% NEFE Acid in 4 stages using 500# rock salt between stages. Flushed W/35 Bbls. 2% KCl water.
 8. Install pumping equipment. Test.
Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED [Signature] TITLE Asst. Dist. Mgr. DATE 10-4-82

(This space for Federal or State office use)

APPROVED BY (Orig. Seal) PETER W. CHESTER TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY: