


N

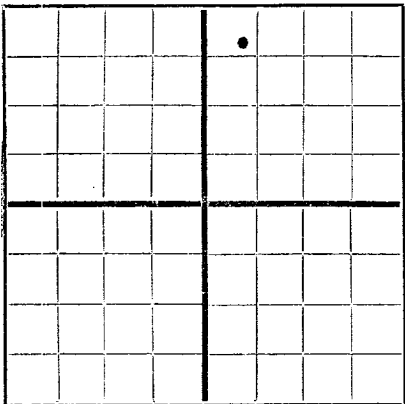

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Gulf Oil Corporation Hobbs, New Mexico
Company or Operator Address
Rollon Brunson Well No. 6 in NE of Sec. 10 T. 22S
Lease
R. 37E, N. M. P. M., Drinfeld Field, Lea County.
Well is 536 feet south of the North line and 2104 feet west of the East line of Section 10
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is R. L. Brunson, Address: Eunice, New Mexico
If Government land the permittee is, Address:
The Lessee is Gulf Oil Corporation - Gypsy Division, Address: Tulsa, Oklahoma
Drilling commenced December 10, 1948 Drilling was completed January 19, 1949
Name of drilling contractor Olson Drilling Company, Address: Midland, Texas
Elevation above sea level at top of casing 3403 feet.
The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 5100' to 5250' No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.
No. 2, from to (ROTARY TAPS) feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM	TO	PURPOSE
13-3/8"	48#	8 Rd	SS	278'					
9-5/8"	36#	8 Rd	SS	278'					
7"	23#	8 Rd	SS	6419'					

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
17-1/4"	13-3/8"	293'	300	1200		
12-1/4"	9-5/8"	2800'	1300			
8-3/4"	7"	6430'	300			

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Acid - 15%	1000			

Results of shooting or chemical treatment Flowed 352 bbls. of oil in 24 hours through 3/4" choke.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 6537 feet, and from feet to feet
Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing January 19, 1949
The production of the first 24 hours was 352 barrels of fluid of which 100% was oil; % emulsion; % water; and % sediment. Gravity, Be. API 42
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

Olson Drilling Company Driller Driller
Driller Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 1st day of February 1, 1949, at Hobbs, New Mexico
Notary Public
My Commission expires 10-24-49
Name District Sup't.
Position District Sup't.
Representing Gulf Oil Corporation
Company of Operator
Address Box 1667, Hobbs, New Mexico

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	300		Caliche, red bed and red rock
	765		red bed and red rock
	995		red bed
	1160		red rock
	1400		Salt
	2517		Anhydrite and salt
	2801		Anhydrite and gyp
	6517		Lime
	6537		Lime
			<u>FORMATION TOPS</u>
			Anhydrite 1120'
			Base Salt 2380'
			Brown Lime 2650'
			White Lime 3840'
			Oil Pay 6430'