


## NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

## NOTICE OF INTENTION TO DRILL

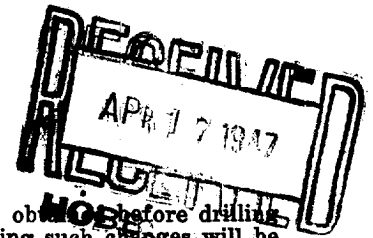

Notice must be given to the Oil Conservation Commission or its proper agent and approval obtained before drilling begins. If changes in the proposed plan are considered advisable, a copy of this notice showing such changes will be returned to the sender. Submit this notice in triplicate. One copy will be returned following approval. See additional instructions in Rules and Regulations of the Commission.

Hobbs, New Mexico

April 11, 1947

Place

Date

OIL CONSERVATION COMMISSION,  
Santa Fe, New Mexico,

Gentlemen:

You are hereby notified that it is our intention to commence the drilling of a well to be known as

Skelly Oil Company

Baker "B"

Well No. 7 in CNW/4 SE/4

Company or Operator

Lease

of Sec. 10, T. 22S, R. 37E, N. M. P. M., Drinkard Field, Lea County.

N

The well is 1980 feet (N.) of the South line and 660 feet (E.) (W.) of the East line of Section 10-22S-37E

(Give location from section or other legal subdivision lines. Cross out wrong directions.)

If state land the oil and gas lease is No. Assignment No.

If patented land the owner is A. B. Baker

Address Eunice, New Mexico

If government land the permittee is

Address

The lessee is SKELLY OIL COMPANY

Address Tulsa, Oklahoma

AREA 640 ACRES

LOCATE WELL CORRECTLY

We propose to drill well with drilling equipment as follows:

Rotary tools from top to total depth.

The status of a bond for this well in conformance with Rule 39 of the General Rules and Regulations of the Commission is as follows:

We propose to use the following strings of casing and to land or cement them as indicated:

Size of Hole	Size of Casing	Weight Per Foot	New or Second Hand	Depth	Landed or Cemented	Sacks Cement
17"	13-3/8"	40.5#	New	200'	Cemented	200
11"	9-5/8"	36#	New	2800'	Cemented	1200
8 1/2"	7"	23#	New	6700'	Cemented	500

If changes in the above plan become advisable we will notify you before cementing or landing casing. We estimate that the first productive oil or gas sand should occur at a depth of about 6600 feet.

Additional information: Halliburton Process shall be used to cement all casing strings, and sufficient time shall be allowed for cement to thoroughly set before drilling plug.

Approved \_\_\_\_\_, 19\_\_\_\_  
except as follows: APR 17 1947

Sincerely yours,

SKELLY OIL COMPANY

Company or Operator

By

Position

Dist. Supt.

Send communications regarding well to

Name

Skelly Oil Company

Address

Hobbs, New Mexico

OIL CONSERVATION COMMISSION,

By

Title

Oil &amp; Gas Inspector

