



N

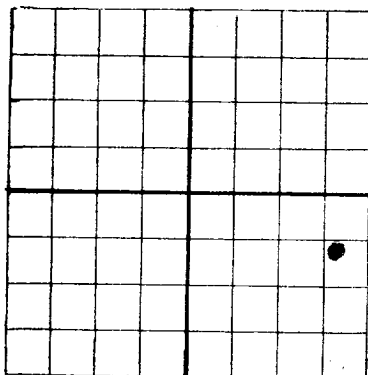

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

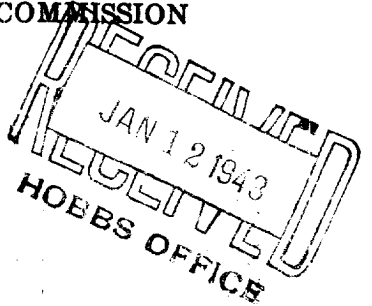

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Parker Drilling Co. Oil & Gas Bldg. Houston Texas
 (alternate) 55' E. of Cen. Address
A. B. Baker Well No. **1** in NE of SE of Sec. **10**, T. **22**
 R. **37**, N. M. P. M., **Penrose** Field, **Lea** County.
 Well is **660** feet south of the North line and **625** feet west of the East line of **A.B. Baker lease**.
 If State land the oil and gas lease is No. _____ Assignment No. _____
 If patented land the owner is **A. B. Baker**, Address **?**
 If Government land the permittee is _____, Address _____
 The Lessee is **Skelly & Argo Oil Cos. T.M. Delimeyer**, Address **El Paso, Ft. Worth & Carlsbad**
 Drilling commenced **July 31, 1942** Drilling was completed **Dec. 10, 1942**
 Name of drilling contractor **Parker Drilling Co.**, Address **Houston Texas**
 Elevation above sea level at top of casing **3385'** feet.
 The information given is to be kept confidential until _____ 19____

OIL SANDS OR ZONES

No. 1, from **3630** to **3650** No. 4, from _____ to _____
 No. 2, from _____ to _____ No. 5, from _____ to _____
 No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from **180** to **190** feet. **1 bailer per hr.**
 No. 2, from **710** to **760** feet. **HPH**
 No. 3, from _____ to _____ feet.
 No. 4, from _____ to _____ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
13"	50#	8	Used	95'	Tex Pat	0	0	0	Surface Pipe
10"	45#	8	"	425'	"	0	0	0	Intermediate
8"	28#	8	"	700'	"	0	0	0	"
7"	20#	10	"	1080'	"	0	0	0	"
5 1/2"	14#	8	New	3610'	"	0	0	0	Oil String

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
15"	13"	95'	100	Halliburton	Cemented to top	
7"	5 1/2"	3610'	250	"	12 lb.	2 1/2 tons

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____
 Adapters—Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Acid	2000 gal.	12/3/42	3630-50	20 3680'

Results of shooting or chemical treatment **10 bbls per day before treatment**
20 bbls. per day after treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet
 Cable tools were used from **0** feet to **3680' 10"** and from _____ feet to _____ feet

PRODUCTION

Put to producing **Dec. 15, 1942**
 The production of the first 24 hours was **20** barrels of fluid of which **100%** was oil; **0** % emulsion; **0** % water; and **0** % sediment. Gravity, Be **37°**
 If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
 Rock pressure, lbs. per sq. in. **900 lbs.**

EMPLOYEES

Earl Dodge, Driller _____, Driller
C. H. Parker, Driller _____, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this **2nd**, **El Paso** Texas, **Jan. 2, 1943**
 day of _____ 19____ Name **H. E. Hull**

Henry Regier, Notary Public
 Position **Supt.**
 Representing **Parker Drilling Co.**
 Address **Oil & Gas Bldg. Houston Texas**

My Commission expires **June 30, 1943**

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	20	20	Caliche
20	95	75	Red Rock
95	180	85	" "
180	190	10	Sand
190	710	520	Red Rock
710	760	50	Sand
760	1090	330	Red Rock
1090	1200	110	Anyhidrite
1200	2450	1250	Salt, Potash & Anyhidrite
2450	3680TD	1230	Lime
			Oil 3630 to 3650
			TD 3680'