

DUPLICATE


RECEIVED
FEB 11 1948
RECEIVED

FORM C-105

N

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

HOBBS OFFICE

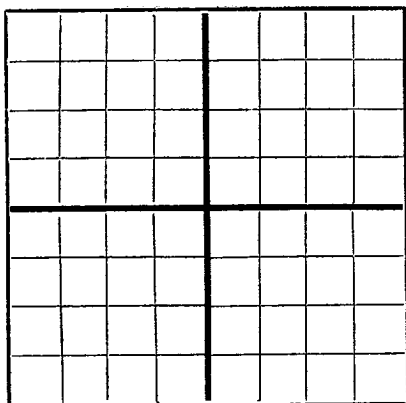

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Skelly Oil Company **Tulsa, Oklahoma**
Company or Operator Address
Baker "B" Well No. **9** in **SW 1/4 SE 1/4** of Sec. **10**, T. **22S**
Lease
R. **37E**, N. M. P. M., **Drinkard** Field, **Lea** County.
Well is **3150** feet south of the North line and **4270** feet west of the East line of **Section 10**
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is **A. B. Baker**, Address **Eunice, New Mexico**
If Government land the permittee is, Address
The Lessee is **Skelly Oil Company**, Address **Tulsa, Oklahoma**
Drilling commenced **Oct. 29** 19**47** Drilling was completed **Dec. 13** 19**47**
Name of drilling contractor **Makin Drilling Company**, Address **Hobbs, New Mexico**
Elevation above sea level at top of casing **3422** feet.
The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from **6500** to **6520** No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	OUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
13-3/8"	40.5	W	Armco	138'6"	TP				
9-5/8	40	8R	SS, N-80	485'3"					
9-5/8	36	8R	SS, J-55	2338'9"	Guide				
7	23	8R	SS, N-80	14'9"					
7	20	8R	SS, J-55	4115'7"					
7	23	8R	SS, J-55	1682'3"					
7	23	8R	SS, N-80	751'8"	Guide				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
17"	13-3/8"	155'	150	Halliburton		
12 1/2"	9-5/8"	2820	1000	"		
8"	7"	6527	500	"		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Mud Acid	500 gals.	12-20-47	6500-6520'	
		15% acid	1000 gals.	12-22-47	6500-6520	

Results of shooting or chemical treatment.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from **0** feet to **6527** feet, and from feet to feet
Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing **January 1** 19**48**
The production of the first 24 hours was **135** barrels of fluid of which **100** % was oil; % emulsion; % water; and % sediment. Gravity, Be.
If gas well, cu. ft. per 24 hours **GOR 1610/1** Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

Glenn Strange, Driller, Driller
Driller, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this **30th** day of **January**, 19**48**
Hobbs, New Mexico **January 30, 1948**
Name **V. A. Mulvey**
Position **Dist. Supt.**
Representing **Skelly Oil Company**
Company or Operator
Address **Hobbs, New Mexico**
My Commission expires **April 22, 1950**

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	20	20	Cellar
20	40	20	Caliche & Sand
40	140	100	Clay
140	155	15	Red Bed
155	550	395	Red Bed & Shale
550	1120	570	Red Bed & Shells
1120	1328	208	Red Bed & Anhydrite.
1328	1425	97	Salt & Anhydrite
1425	2160	735	Salt & Shells
2160	2400	240	Salt & Anhydrite
2400	2788	288	Anhydrite
2788	2805	17	Lime & Broken Anhydrite
2805	2820	15	Lime & Anhydrite
2820	2985	165	Anhydrite & Lime
2985	3047	62	Lime
3047	3186	139	Lime & Anhydrite
3186	3315	129	Lime & Shale
3315	3375	60	Lime & Anhydrite
3375	3435	60	Lime
3435	3505	70	Lime, Anhydrite, & Shale
3505	3545	40	Anhydrite & Lime
3545	3699	154	Lime
3699	3754	55	Sandy Lime
3754	3845	91	Lime
3845	3890	45	Anhydrite
3890	3975	85	Lime
3975	4035	50	Sandy Lime
4035	4881	846	Lime
4881	4909	28	Lime & Sand
4909	4948	39	Lime
4948	5107	159	Lime & Sand
5107	5101	6	SLM Correction
5101	5165	64	Lime
5165	6450	285	Lime
6450	6524	74	Lime
6524	6527	3	SLM Correction