

NO. OF COPIES RECEIVED	
DISTRIBUTION	
SANTA FE	
FILE	
U.S.G.S.	
LAND OFFICE	
OPERATOR	

NEW MEXICO OIL CONSERVATION COMMISSION

Form C-103
Supersedes Old
C-102 and C-103
Effective 1-1-65

SUNDRY NOTICES AND REPORTS ON WELLS

DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO RE-ENTER OR RE-LOCATE TO A DIFFERENT RESERVOIR.
USE "APPLICATION FOR PERMIT TO DRILL OR RE-ENTER OR RE-LOCATE TO A DIFFERENT RESERVOIR."

1. OIL WELL ☐ GAS WELL ☒ OTHER ☐		5a. Indicate Type of Lease State ☐ Fee ☒
Name of Operator Mobil Producing TX. & N.M. Inc.		5. State Oil & Gas Lease No.
Address of Operator Nine Greenway Plaza, Suite 2700, Houston, TX 77046		7. Unit Agreement Name
4. Location of Well UNIT LETTER <u>0</u> <u>660</u> FEET FROM THE <u>South</u> LINE AND <u>1880</u> FEET FROM THE <u>East</u> LINE, SECTION <u>11</u> TOWNSHIP <u>22S</u> RANGE <u>37E</u> N.M.P.M.		8. Farm or Lease Name S. E. Long
15. Elevation (Show whether DE, RT, GR, etc.) 3346 GR		9. Well No. 5
12. County Lea		10. Field and Pool, or Wildcat Blinbry/Tubb

16. Check Appropriate Box To Indicate Nature of Notice, Report or Other Data
NOTICE OF INTENTION TO: SUBSEQUENT REPORT OF:

PERFORM REMEDIAL WORK ☒ TEMPORARILY ABANDON ☐ PULL OR ALTER CASING ☐ OTHER ☐	PLUG AND ABANDON ☐ CHANGE PLANS ☐ OTHER ☐	REMEDIAL WORK ☐ COMMENCE DRILLING OPNS. ☐ CASING TEST AND CEMENT JOBS ☐ OTHER ☐	ALTERING CASING ☐ PLUG AND ABANDONMENT ☐ OTHER ☐
--	--	--	---

17. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

See Attachment

18. I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNED Robert J. Gay TITLE Authorized Agent DATE April 30, 1980
 Orig. Signed by
 Jerry Sexton
 APPROVED BY Dist. L. Suggs TITLE _____ DATE MAY 1 1980
 CONDITIONS OF APPROVAL, IF ANY:


ATTACHMENT

17.
 - 1) Kill well. Tubb down tbg., Blinebry down casing.
 - 2) Pooh w/ 2-3/8 tubing and seal assembly from Model "D" Packer @ 5850'
 - 3) GIH w/ RBP and set at 5840' (above Model "D" Pkr)
 - 4) GIH w/ Bit and scraper to clean up 5-1/2" csg.
 - 5) Circulate cuttings off bottom and pooh w/ RBP.
 - 6) GIH w/
 - a) Seal assembly with a 1.41" "F" profile with a 10' sub below assembly.
 - b) "ER" receptacle w/ 1.5" "F" profile above the seal assembly. Substitute shear pins and remove the J slot so receptacle cannot be locked in to assembly.
 - c) 470' 2-3/8 tubing and crossover to 2-1/16" tubing.
 - d) 30' of 2-1/16" tubing and Model A-5 Dual packer w/ 1.5" "F" profile on short string side.
 - e) Finish running 2-1/16" tubing to bottom.
 - 7) Latch in the seal assembly, and shear the shear pins so "ER" Receptacal is sitting on the seal assembly. (ER Receptacal will not be latched in)
 - 8) GIH w/ second string of 2-1/16" tub, latch into the Baker Model A-5 Packer.
 - 9) Run a plug down the short string and set in 1.5" "F" profile on Model A-5 Pkr.
 - 10) Pressure up on short string to set Model A-5 Pkr.
 - 11) Pull plug out of short string.
 - 12) If needed swab to return to production.

DIAGRAMMATIC WELLBORE SKETCH

PRESENT Well SKETCH
1/30/80

LEASE SE Long
FIELD Blindry & Tubbs
WELL #5
COMPLETION DATE _____
LOCATION O-511-T225-R37E
COUNTY & STATE Long, NM.
ELEVATION _____
DRAWN BY: R.D. George
DATE 4/24/78

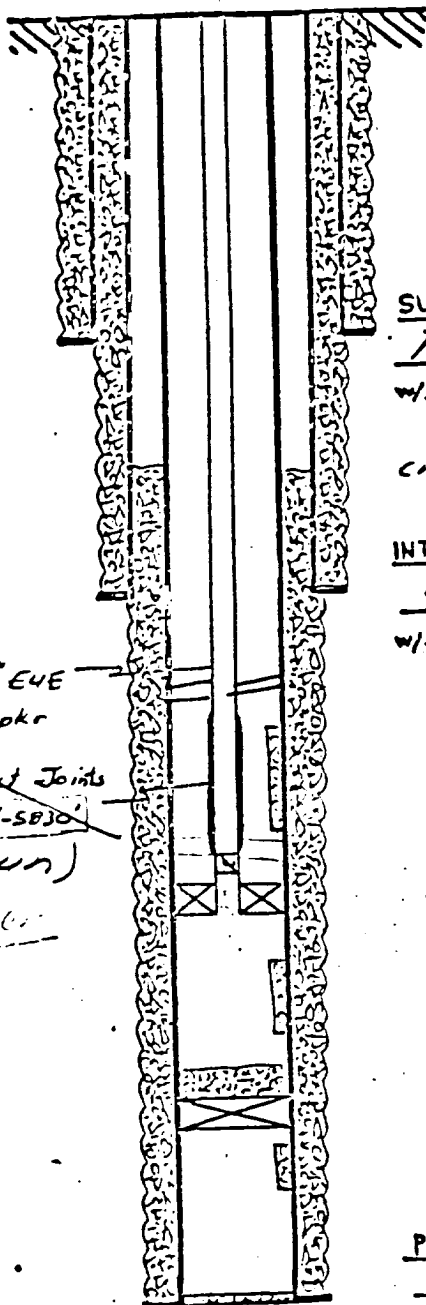

SURFACE

13 3/4 " lb at 265 '
w/ 250 sx cmt. Cmt top CIRC .

CMT TOP 1173 (calc.)

INTERMEDIATE

9 5/8 " lb at 2815 '
w/ 1000 sx cmt. Cmt top CIRC .

Blindry Perfs 5446' - 5819'

sliding sleeve @ 5830'

Baker Model "D" w/on/off assembly @ 5850'

Tubb Perfs 5887' - 6119'

40' plug (4sx circ "C" neat)

CIBP @ 6240'

Drinkord perfs 6256' - 6475'

PRODUCTION

5 1/2 " 17 lb. at 6491 '
w/ 925 sx cmt. Cmt top 1173 (calc.)

T.D. 6491 ' P.B.T.D. 6490 '

MWD

Diagnostic Well Sketch

J.E. Long No. 5

0-11-22-37

Blinbury Tubb Field

Lea County N.M.

Proposed
Sketch

Elevation:

13 3/8 csg @ 265' cmt w/ 250 SX CIRC

265'

CMT. Top 1,173' (calc.)

9 5/8 csg @ 2815' cmt w/ 1000 SX CIRC

2815'

5346'

Baker Model A-5 PKR w/ 1.50 FNIPPLI
SHORT STRING

5896' CROSSOVER 2 3/8" to 2 1/2" TBG

Blinbury PERFS 5446'-5819'
(373')

Baker Model D PKR @ 5850' w/
1.5" FNIPPLI in Seal Assembly & ER REC.
J slot cutoff, not latched in.

Tubb PERFS 5887'-6119'

CIBP @ 6240 capped w/ 40' (45X)
CLASS C NEAT.

Drinkard PERFS 6256'-6475'

5 1/2" 17/16 csg 6491' w/ 925 SX

PBTD 6491
TD 6490

MRV 1/28/80