



N

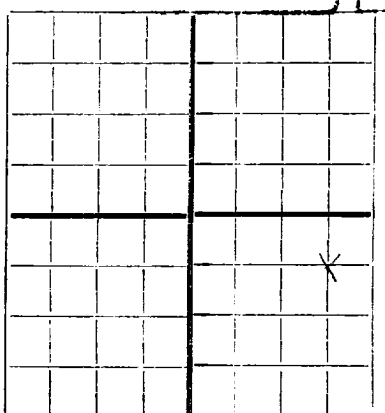

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

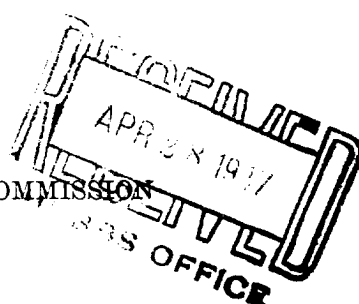

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). **SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.**

The Ohio Oil Company

Hobbs, New Mexico

Company or Operator

Address

Edith Butler "B"

Well No.

1

in NE 1/4, SE 1/4 of Sec.

13

T. 22-S

Lease

R. 37-E

N. M. P. M.

Drinkard

Field,

Lea

County.

Well is 3300

feet south of the North line and

660'

feet west of the East line of

Sec. 13

If State land the oil and gas lease is No.

Assignment No.

If patented land the owner is

Mrs. Edith Butler et al

Address

Graham, Texas

If Government land the permittee is

Address

The Lessee is The Ohio Oil Company

Address

Hobbs, New Mexico

Drilling commenced February 19,

19

47

Drilling was completed

March 23,

19

47

Name of drilling contractor

J. F. Postelle

Address

Odessa, Texas

Elevation above sea level at top of casing

3338 DF

feet.

The information given is to be kept confidential until

19

OIL SANDS OR ZONES

No. 1, from 2530

to

5140

No. 4, from 6123

to

6855

No. 2, from 5140

to

5210

No. 5, from

to

No. 3, from 5210

to

6123

No. 6, from

to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from

to

feet.

No. 2, from

to

feet.

No. 3, from

to

feet.

No. 4, from

to

feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
13-3/8	48	8 rd	New	297	None				
8-5/8	32	8 rd	New	2811	HOW				
5-1/2	17	8 rd	New	6863	Baker				
2-3/8Tbg.	4.7	8 rd	New	6889	Seating Nipple				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
17"	13-3/8	306'	250	Halliburton		
11"	8-5/8	2795'	1500	"		
8"	5-1/2	6823'	600	"		

PLUGS AND ADAPTERS

Heaving plug—Material

Length

Depth Set

Adapters—Material

Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Acid	2000 20%	Mar. 28-47	6860' to 6950'	
		"	6000 15%	Mar. 29-47	6860' to 6950'	

Results of shooting or chemical treatment. After acidizing w/6000 gal. well flowed 145 B/O in 24 hrs. based on 6 hr. test.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from surface feet to 6950 feet, and from - - feet to - - feet

Cable tools were used from - - feet to - - feet, and from - - feet to - - feet

PRODUCTION

Put to producing April 1, 1947

The production of the first 24 hours was 145 barrels of fluid of which 100% was oil;

emulsion; % water; and % sediment. Gravity, Be 40.3

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

C. R. Robinette

Driller

H. D. Daniel

Driller

J. P. Ivy

Driller

Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 22

Hobbs, New Mexico

April 22, 1947

day of April

1947

Name

P. B. Stewart

Position Superintendent

Representing The Ohio Oil Company

Company or Operator

Address Box 1607- Hobbs, New Mexico

Notary Public

MY COMMISSION EXPIRES AUG. 19, 1947

My Commission expires

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	39	39	Caliche
39	1140	1101	Red Bed- Shells
1140	1300	160	Anhydrite
1300	1515	215	Salt -Shells
1515	2390	875	Salt Anhydrite
2390	3400	1010	Anhydrite
3400	3560	160	Lime
3560	3645	85	Lime- Anhydrite
3645	3684	39	Lime
3684	3720	36	Lime Sand
3720	6950	3230'	Lime
DEVIATION SURVEY			
		Depth Taken	Degrees Off Vertical
		250	0
		500	0
		750	0
		1000	0
		1250	1/2
		1500	0
		1750	0
		2000	0
		2550	0
		2750	3/4
		3000	1-1/2
		3250	0
		3750	0
		4000	0
		4250	0
		4500	0
		4750	0
		5000	0
		5250	0
		5500	0
		5750	0
		6000	0
		6250	0
		6500	0
		6750	0