

NO. OF COPIES RECEIVED	
DISTRIBUTION	
SANTA FE	
FILE	
U.S.G.S.	
LAND OFFICE	
OPERATOR	

NEW MEXICO OIL CONSERVATION COMMISSION

Form C-101
Revised 1-1-65

5A. Indicate Type of Lease
STATE ☐ FEE ☒

5. State Oil & Gas Lease No.

APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK

1a. Type of Work		7. Unit Agreement Name	
b. Type of Well DRILL <input type="checkbox"/> DEEPEN <input checked="" type="checkbox"/> PLUG BACK <input type="checkbox"/>		8. Farm or Lease Name HUGH	
c. Type of Well OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER <input type="checkbox"/>		9. Well No. 1	
2. Name of Operator GULF OIL CORPORATION		10. Field and Pool, or Wildcat WANTZ ABO	
3. Address of Operator P.O. Box 670 Hobbs New Mexico		12. County LEA	
4. Location of Well UNIT LETTER D LOCATED 660 FEET FROM THE NORTH LINE AND 660 FEET FROM THE WEST LINE OF SEC. 14 TWP. 22 S RGE. 37 E NMPM			
21. Elevations (Show whether DT, RT, etc.) 3372 GLE		19. Proposed Depth 7600	
21A. Kind & Status Plug. Bond		19A. Formation GRANITE WASH	
21B. Drilling Contractor UNKNOWN		20. Rotary or C.T. ROTARY	
22. Approx. Date Work will start 10/15/83			

PROPOSED CASING AND CEMENT PROGRAM

SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	SACKS OF CEMENT	EST. TOP
6 1/4	4 1/2	10.5	7600	To Be Determined	3000'

INTEND TO SET CEMENT RETAINER ABOVE DRINKARD PERFS (6204-6324) AND SQUEEZE W/100 SA "H" W/0.6% HALAD 9. THEN PRESSURE TEST PREVIOUS SQUEEZED PADDOCK (5075-5160) AND PENROSE (3553-3666) TO 1000 PSI AND RESQUEEZE IF NECESSARY. THEN DRILL OUT CMT RETAINER AND PRESSURE TEST CASING TO 1000 PSI. CLEAN OUT TO BASE OF CASING (6348) AND DRILL 6 1/4" HOLE W/ FRESH WATER MUD 8.3-8.8 PPG. BOP FOR 6 1/4" HOLE @ GULF 30 P DRAWING #1 (SEE ATTACHED)

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: IF PROPOSAL IS TO DEEPEN OR PLUG BACK, GIVE DATA ON PRESENT PRODUCTIVE ZONE AND PROPOSED NEW PRODUCTIVE ZONE. GIVE BLOWOUT PREVENTER PROGRAM, IF ANY.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

Signed Ed Pittie Title AREA ENGINEER Date 10-10-83



ORIGINAL SIGNED BY EDDIE SEAY

APPROVED BY OIL & GAS INSPECTOR TITLE DATE OCT 13 1983

CONDITIONS OF APPROVAL, IF ANY:

APPROVAL VALID FOR 180 DAYS
PERMIT EXPIRES 4-13-84
LESS DRILLING UNDERWAY

RECEIVED
OCT 12 1983
OCT
HOBBS OFFICE

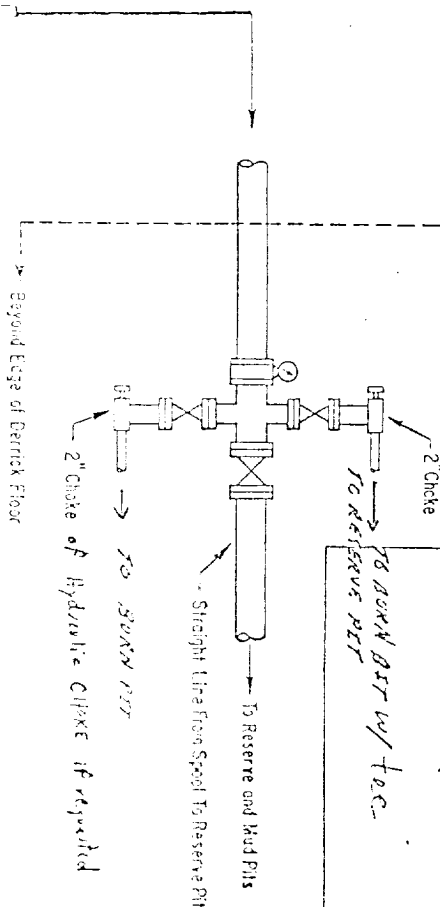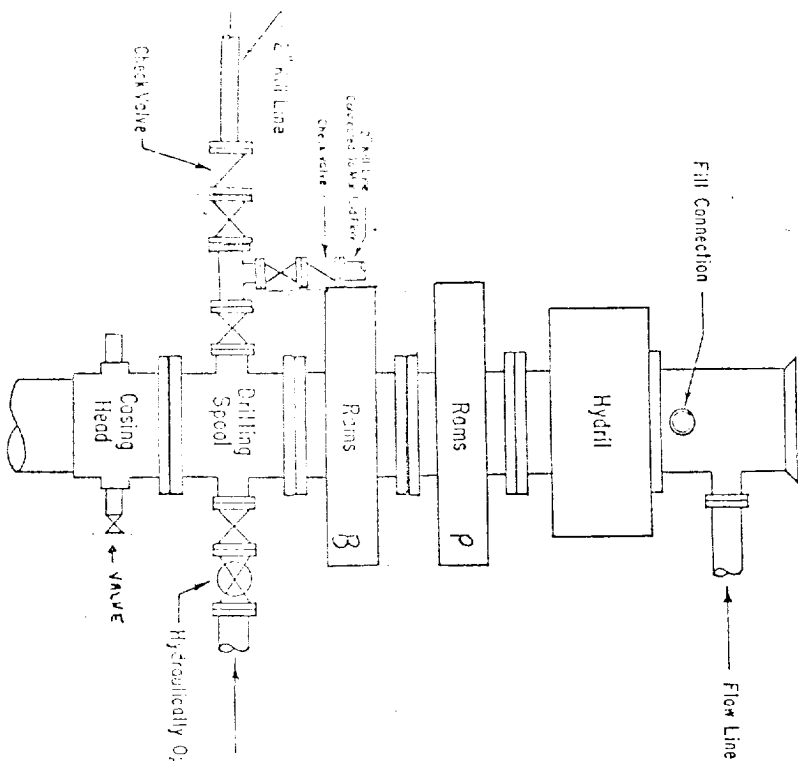

ADDITIONS - DELETIONS - CHANGES SPECIFY

NOTE: "Wells Required" means at any time the Gulf Service can, may, or will require the equipment to be installed during operations.

2000-3000 PSI WORKING PRESSURE BOP HOOK-UP FOR LARGE CASINGS

SPECIFY WORKING PRESSURE

The closing manifold and remote closing manifold shall have a separate control for each pressure-operated device. Controls are to be labeled, with control handles to indicate open and closed positions. A pressure reducer and regulator must be provided for operating the Hydril preventer. When requested, a second pressure reducer shall be available to limit operating fluid pressures to ram preventers. Gulf Legion No. 36 hydraulic oil, an equivalent or better, is to be used as the fluid to operate the hydraulic equipment.

The choke manifold, the choke flow line, the choke lines and the relief lines are to be supported by metal stands and adequately anchored. The choke flow line, relief lines and choke lines shall be constructed as straight as possible and without sharp bends. Easy and safe access shall be maintained to the choke manifold. All valves are to be selected for operation in the presence of oil, gas, and drilling fluids. The choke flow line valves and valves of the relief lines connected to the drilling spools and all ram type preventers must be equipped with stem extensions, universal joints, if needed, and hand wheels which are to extend beyond the edge of the derrick substructure. All other valves shall be equipped with handles.

The blowout preventer assembly shall consist of one blind ram preventer and one pipe ram preventer, both hydraulically operated, a hydraulic accumulator, valves, chokes and connections, as illustrated. If a tapered drill string is used, a ram preventer shall be provided for each size of drill pipe. Casing and tubing rams to fit the preventers are to be available as needed. The ram preventers may be two types or a double type. If correct in size, the flanged outlets of the ram preventer may be used for connecting to the 4-inch I.D. choke flow line and to the kill line. The substructure height shall be sufficient to install a rotating blowout preventer.

Minimum operating equipment for the preventers and hydraulically operated valves shall be as follows: (1) multiple pumps, driven by a continuous source of power, capable of fluid changing the total accumulator volume from the nitrogen precharge pressure to its rated pressure within 2 minutes. Also, the pumps are to be connected to the hydraulic operating system which is to be a closed system. (2) accumulators with a precharge of nitrogen of not less than 750 PSI and connected so as to receive the aforementioned fluid charge. With the charging pumps shut down, the pressurized fluid volume stored in the accumulators shall be sufficient to close all the pressure-operated devices simultaneously within 19 seconds after closure. The remaining accumulator pressure shall be not less than 1000 PSI with the remaining accumulator fluid volume of least 50 percent of the original. When requested, either an additional source of power, remote and equivalent, is to be available to operate the above pumps or there shall be additional pumps operated by separate power and equal in performance capabilities.

NEW MEXICO OIL CONSERVATION COMMISSION
WELL LOCATION AND ACREAGE DEDICATION PLAT

Form C-102
Supersedes C-128
Effective 1-1-65

All distances must be from the outer boundaries of the Section.


Operator <i>Gulf Oil Corporation</i>			Lease <i>Hugh</i>		Well No. <i>1</i>
Unit Letter <i>B</i>	Section <i>14</i>	Township <i>22S</i>	Range <i>37E</i>	County <i>Lea</i>	
Actual Footage Location of Well: <i>660</i> feet from the <i>North</i> line and <i>660</i> feet from the <i>West</i> line					
Ground Level Elev: <i>3372'</i>	Producing Formation <i>Granite Wash</i>		Pool <i>Wants Also</i>	Dedicated Acreage: <i>40</i> Acres	

1. Outline the acreage dedicated to the subject well by colored pencil or hatchure marks on the plat below.
2. If more than one lease is dedicated to the well, outline each and identify the ownership thereof (both as to working interest and royalty).
3. If more than one lease of different ownership is dedicated to the well, have the interests of all owners been consolidated by communitization, unitization, force-pooling, etc?

☐ Yes ☐ No If answer is "yes," type of consolidation _____

If answer is "no," list the owners and tract descriptions which have actually been consolidated. (Use reverse side of this form if necessary.) _____

No allowable will be assigned to the well until all interests have been consolidated (by communitization, unitization, forced-pooling, or otherwise) or until a non-standard unit, eliminating such interests, has been approved by the Commission.

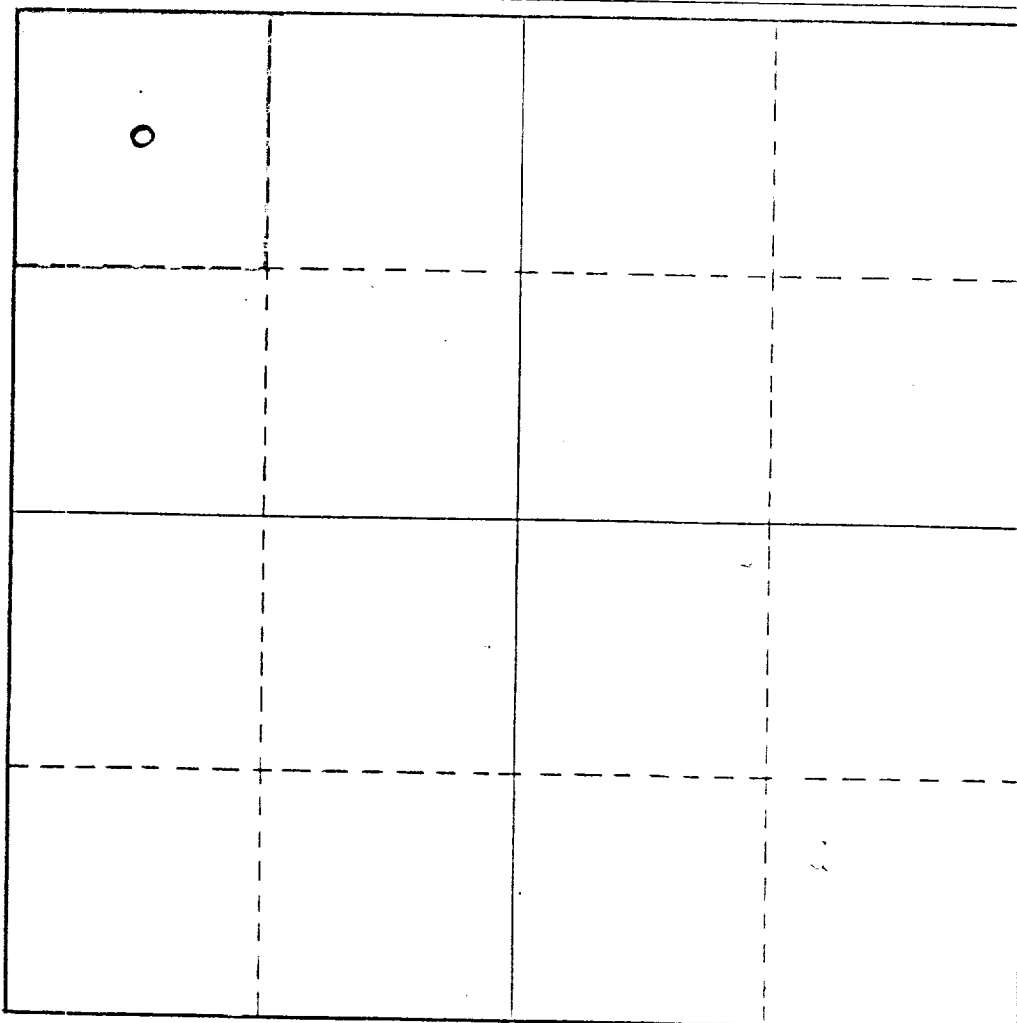

CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief.

R.D. Pitre

Name

R.D. PITRE

Position

AREA ENGINEER

Company

GULF OIL CORP

Date

10-10-83

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my knowledge and belief.

Date Surveyed

Registered Professional Engineer and/or Land Surveyor

Certificate No.

