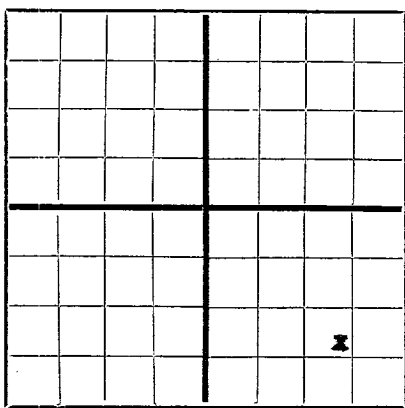


N

AREA 640 ACRES
LOCATE WELL CORRECTLYNEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Samadian Oil Corporation

Box 959, Ardmore, Oklahoma

Company or Operator

Parks

Well No. 3

in SE/4 SE/4

of Sec. 14

Address

T. 22S

Lease

R. 37E, N. M. B. M., Drighard Field, Lea County.

Well is 660 feet south of the North line and 660 feet west of the East line of Section 14

If State land the oil and gas lease is No. Assignment No.

If patented land the owner is O. U. Parks, Address Vink, Texas

If Government land the permittee is, Address

The Lessee is Samadian Oil Corporation, Address Box 959, Ardmore, Oklahoma

Drilling commenced April 1, 1948 Drilling was completed May 6, 1948

Name of drilling contractor Olson Drilling Company, Address Tulsa, Oklahoma

Elevation above sea level at top of casing feet.

The information given is to be kept confidential until Not confidential 19

OIL SANDS OR ZONES

No. 1, from 6392 to 6412 No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from None to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
13 3/8	48 1/2	8 RA		292'	Baker Guide		----		
9 5/8	36 & 32.75	8 RA.		207 1/2'	" "		----		
7"	23 1/2	8 RA.	J-55	6368'	" "		----		

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
17 1/2	13 3/8	292'	300 sacks	Halliburton		
12 1/4	9 5/8	207 1/2'	1000 sacks	Halliburton		
8 3/4	7	6368	500 sacks	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters — Material NONE Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
None						

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 6448 feet, and from feet to feet

Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing May 17, 1948, 19

The production of the first 24 hours was barrels of fluid of which % was oil; %

emulsion; % water; and 101 % sediment. Gravity, Be. 41.1

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

D. R. Boswell, Driller H. H. Vassar, Driller

B. L. Wimbs, Driller H. F. Miller, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 7th day of June, 1948, Ardmore, Okla.

Name Date

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	100	100	Red Bed
100	297	197	Red Bed and Shells
297	1083	786	Red Bed
1083	1448	365	Red Bed, Anhy. and Gyp.
1448	1605	157	Salt and Shale
1605	2132	527	Salt, Anhy. and Gyp.
2132	2317	185	Shale and Gyp.
2317	2357	40	Salt and Anhy.
2357	2382	25	Salt, Anhy. Lime, Shells
2382	2450	68	Anhy., Lime, Gyp.
2450	2795	345	Anhy. Gyp.
2795	2858	63	Anhy. and Lime
2858	2874	16	Anhy. and Gyp.
2874	3404	530	Anhy. and Lime
3404	3453	49	Sandy Lime
3453	3539	86	Lime and Anhydrite
3539	3598	59	Lime, Sand
3598	3651	53	Lime
3651	3692	41	Gyp. Lime, Shale
3692	3727	35	Lime, Anhydrite
3727	3814	87	Sandy Lime
3814	4104	290	Lime, Anhydrite
4104	4217	113	Soft Lime
4217	4562	345	Lime, Anhy.
4562	4695	133	Lime
4695	4763	68	Lime, Anhy.
4763	5115	352	Lime
5115	5269	154	Anhydrite and Lime
5269	5420	151	Lime
5420	5615	195	Lime and Shale
5615	6448	833	Lime
	6448		Total Depth