


DUPLICATE

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

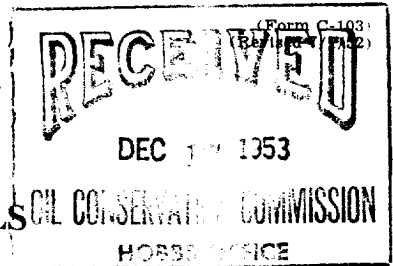

MISCELLANEOUS REPORTS ON WELLS

Submit this report in TRIPLICATE to the District Office, Oil Conservation Commission, within 10 days after the work specified is completed. It should be signed and filed as a report on Beginning Drilling Operations, Results of test of casing shut-off, result of plugging of well, result of well repair, and other important operations, even though the work was witnessed by an agent of the Commission. See additional instructions in the Rules and Regulations of the Commission.

Indicate Nature of Report by Checking Below

REPORT ON BEGINNING DRILLING OPERATIONS		REPORT ON RESULT OF TEST OF CASING SHUT-OFF		REPORT ON REPAIRING WELL	
REPORT ON RESULT OF PLUGGING WELL		REPORT ON RECOMPLETION OPERATION	X	REPORT ON (Other)	

December 14, 1953
(Date)

Midland, Texas
(Place)

Following is a report on the work done and the results obtained under the heading noted above at the

Samedan Oil Corporation

(Company or Operator)

J. O. Parks "A" Lease

(Lease)

J. P. (Dum) Gibbins

(Contractor)

, Well No. 5 in the SW 1/4 SE 1/4 of Sec. 14

T. 22S, R. 37E, NMPM., Blinbry Gas Pool, Lea County.

The Dates of this work were as follows: 10-7-53 to 10-27-53

Notice of intention to do the work (was) ~~XXXXX~~ submitted on ~~August 10, 1953~~ Application & Waivers, 8-10-1953
(Cross out incorrect words)

and approval of the proposed plan (was) ~~XXXXX~~ obtained.

DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

Moved in workover unit, killed Drinkard zone, tried to pull tubing but packer was stuck in well, backed off tubing in collar at 6104' (packer at 6143'), screwed Baker seal nipple receptacle in collar at 6104' set Otis blanking plug in tubing at 6115', Loaded hole with water tested casing & packer to 3000 psi surface pressure. Came out of hole w/tubing, perforated Blinbry zone from 5540-5530, 5520-5505', 5470-5442', 5442-5407'. Ran tubing in w/Baker seal nipple and Garrett Oil Tool 2-zone tool. Seated seal nipple in receptacle at 6100'; Garrett oil Tool at 6092'. Acidized Blinbry casing perforations w/1000 gals. of mud acid, swabbed well, reloaded hole and acidized w/8000 gal acid. Swabbed well for six hrs. Well started flowing. After cleaning up, GOT tool was closed to confine Blinbry gas to casing annulus. Well flowed 1240 MCF gas plus 24 bbls of distillate in 24 hrs.

Witnessed by George E. Trimble
(Name)

Samedan Oil Corporation
(Company)

Petroleum Engineer
(Title)

Approved: OIL CONSERVATION COMMISSION

S. G. Stanley
(Name)

Engineer District 0
(Title)

DEC 17 1953
(Date)

I hereby certify that the information given above is true and complete to the best of my knowledge.

Name *[Signature]*

Position Division Manager

Representing Samedan Oil Corporation

Address 502 V&J Tower, Midland, Texas