

DISTRICT I  
P.O. Box 1980, Hobbs, NM 88240

DISTRICT II  
P.O. Drawer DD, Artesia, NM 88210

DISTRICT III  
1000 Rio Brazos Rd., Aztec, NM 87410

OIL CONSERVATION DIVISION

2040 South Pacheco  
Santa Fe, NM 87505

WELL API NO.  
30-025-10322

5. Indicate Type of Lease  
STATE ☒ FEE ☐

6. State Oil & Gas Lease No.  
B-3480

SUNDRY NOTICES AND REPORTS ON WELLS  
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A  
DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT"  
(FORM C-101) FOR SUCH PROPOSALS)

7. Lease Name or Unit Agreement Name

Cole State

1. Type of Well:  
OIL WELL ☐ GAS WELL ☐ OTHER

2. Name of Operator Zia Energy, Inc.

8. Well No.  
2

3. Address of Operator PO Box 2510, Hobbs, NM 88241

9. Pool name or Wildcat  
Penrose Skelly Grayburg

4. Well Location

Unit Letter D : 660 Feet From The North line and 660 Feet From The West line

Section 16 TOWNSHIP 22S Range 37E NMPM Lea County

10. Elevation (Show whether DF, RKB, RT, GR, etc.)  
3395' GR

11. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

SUBSEQUENT REPORT OF:

PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input checked="" type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>	PLUG AND ABANDONMENT <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>		CASING TEST AND CEMENT JOB <input type="checkbox"/>	
OTHER: <input type="checkbox"/>		OTHER: <input type="checkbox"/>	

12. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

- 1) Dump 35' cement on CIBP at 3490' (25 sacks if by tubing), load hole with 10 ppg brine w/ 25 lbs gel/bbl.
- 2) Perforate at 1190' (top of anhydrite), pump a 25 sack plug from 1190' to 1036' (154').
- 3) Spot 25 sacks from 167' to 411' (across surface shoe) (244'). Tag cement.
- 4) Spot 10 sacks at surface.
- 5) Cut casing off 3' below surface and weld on dry hole marker.
- 6) Cut off anchors and clean location.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Scott Nelson TITLE Engineer DATE 8/10/98

TYPE OR PRINT NAME Scott Nelson

TELEPHONE NO. (505) 393-2937

(This space for State Use)  
ORIGINAL SIGNED BY CHRIS WILLIAMS  
DISTRICT I SUPERVISOR


APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE AUG 10 1998

CONDITIONS OF APPROVAL, IF ANY:

5  
C

an

Cole State #2 – Current Wellbore

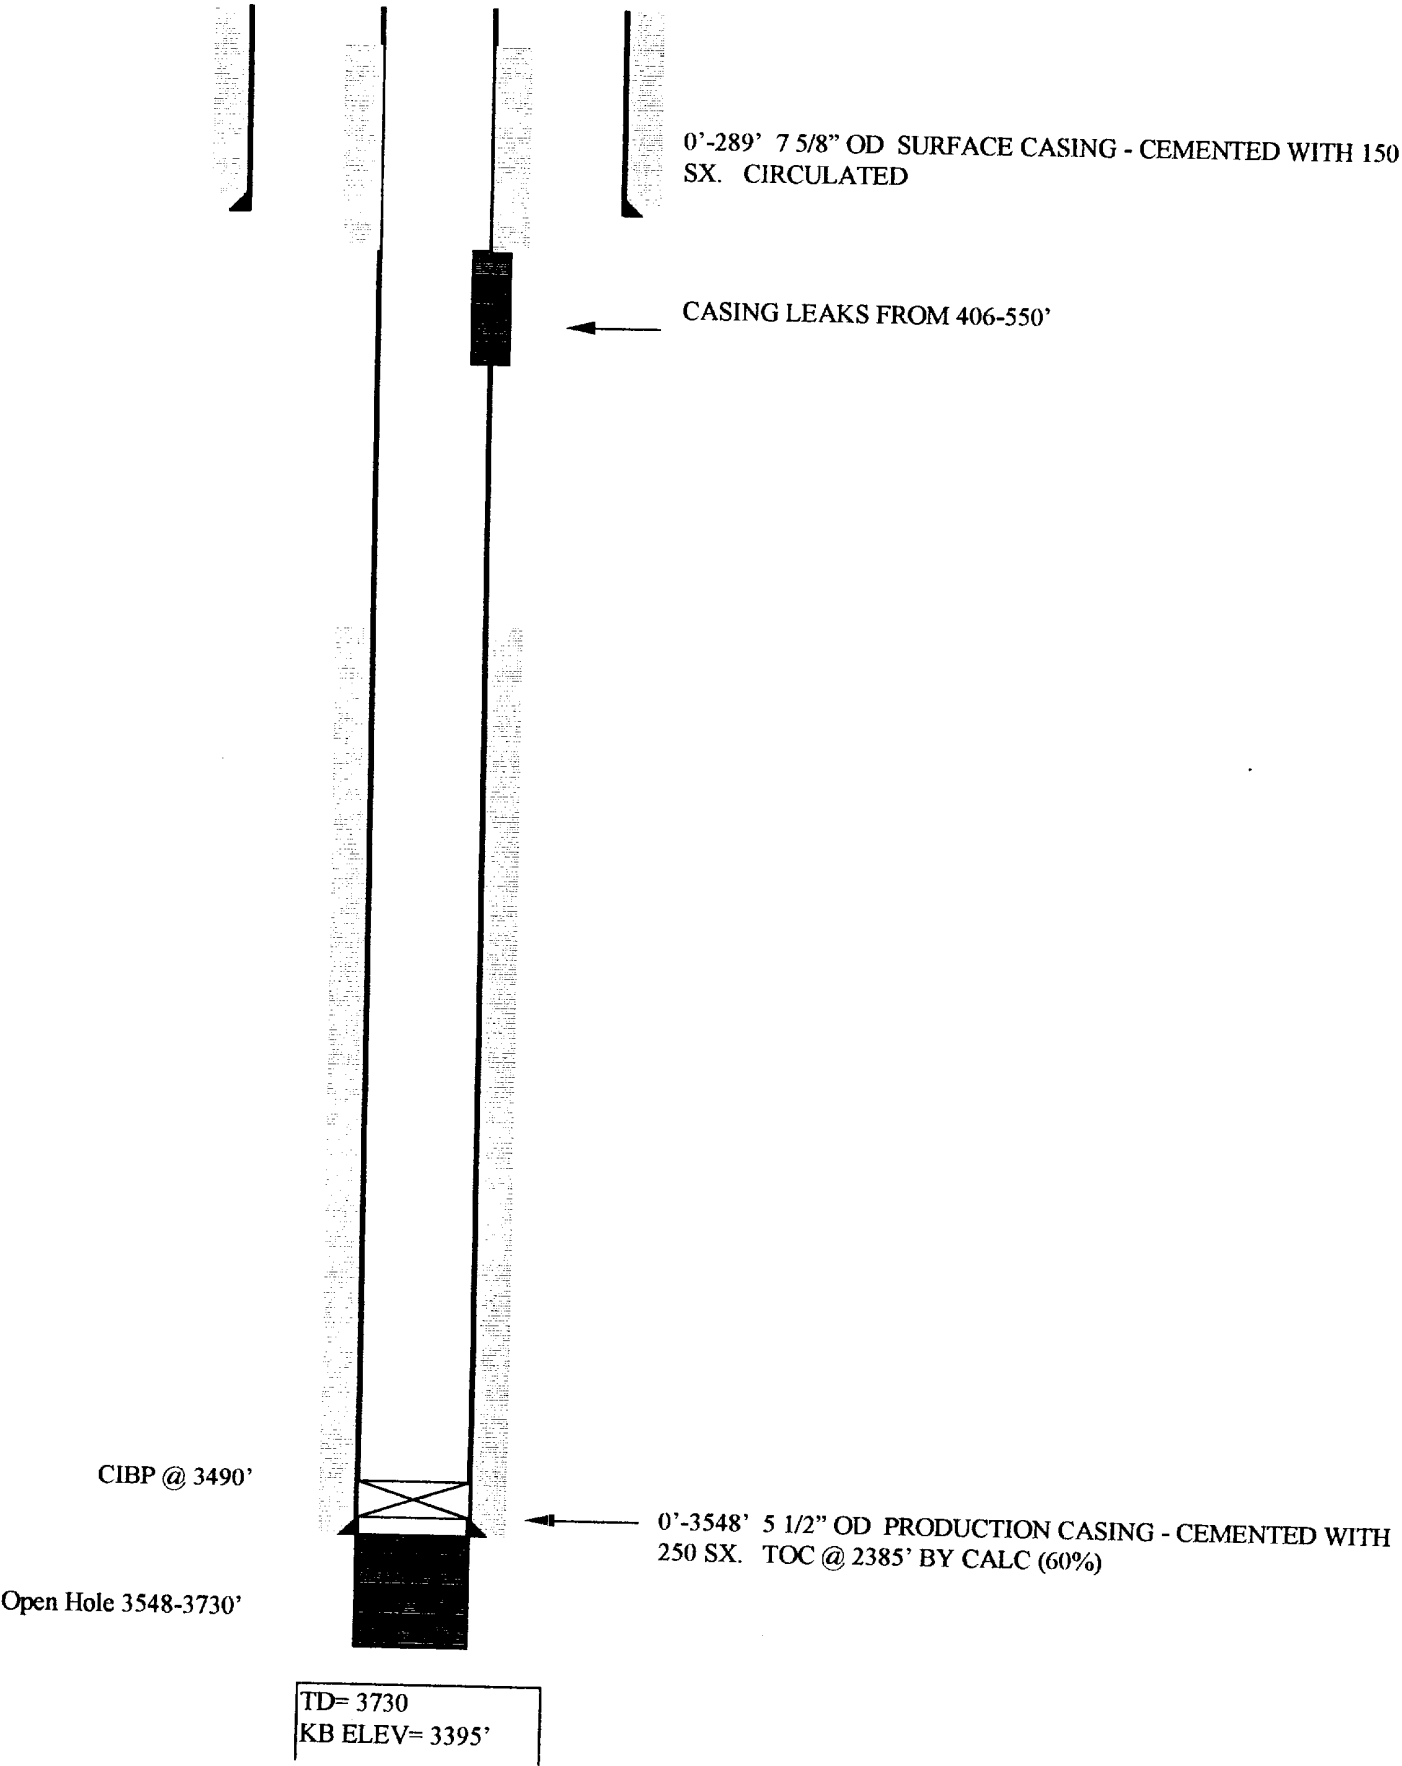

Cole State #2 – Proposed Wellbore

# Cole State #2 – Proposed Wellbore

