



N

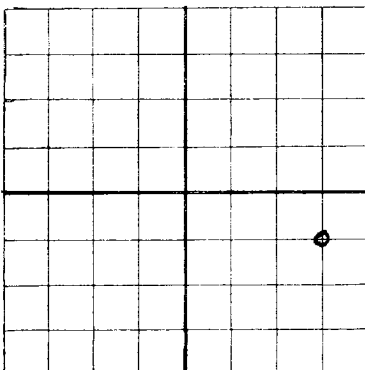

AREA 640 ACRES
LOCATE WELL CORRECTLY

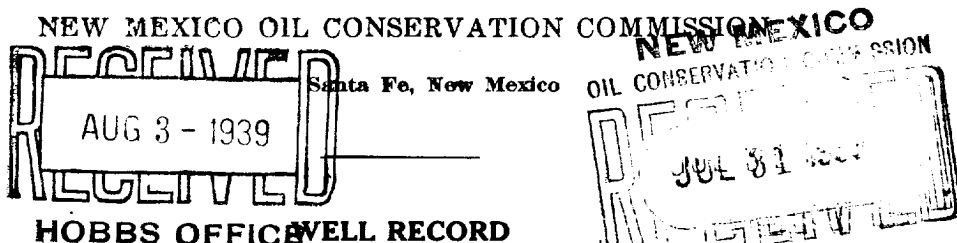

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

~~Osage Drilling Company, Inc. of Oklahoma~~ ~~Midland, Texas~~
 Annie L. Christmas Well No. 1 in NE of SE of Sec. 17, T. 32S
 R. 37 E, N. M. P. M., Pimrose Field, Lea County.
 Well is 660 feet south of the North line and 660 feet west of the East line of Section
 If State land the oil and gas lease is No. _____ Assignment No. _____
 If patented land the owner is Annie L. Christmas, Address Lovington, New Mexico
 If Government land the permittee is _____, Address _____
 The Lessee is _____, Address _____
 Drilling commenced 6-30 1939 Drilling was completed 7-21 1939
 Name of drilling contractor Osage Drilg. Co., Inc., Address Midland, Texas
 Elevation above sea level at top of casing _____ feet.
 The information given is to be kept confidential until _____ 19____

OIL SANDS OR ZONES

No. 1, from 3359 to 3707 No. 4, from _____ to _____
 No. 2, from _____ to _____ No. 5, from _____ to _____
 No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from _____ to _____ feet.
 No. 2, from _____ to _____ feet.
 No. 3, from _____ to _____ feet.
 No. 4, from _____ to _____ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
9	36			307	Set				
5 1/2	17			3475	Float				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
12 1/2	9	307	100	Haliburton		
8-1/8	5 1/2	3475	400	Haliburton		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____
 Adapters—Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Acid	1500 gal	7-23-39	3480-3707	
		✓	4000 "	7-25-39	3580-3703	

Results of shooting or chemical treatment _____

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 3707 feet, and from _____ feet to _____ feet
 Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing 7-24-39 19____
 The production of the first 24 hours was 150 barrels of fluid of which 99 1/2 % was oil; 4 % emulsion; _____ % water; and _____ % sediment. Gravity, Be 35.2
 If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
 Rock pressure, lbs. per sq. in. 125

EMPLOYEES

C. W. Lambert Driller E. M. Stearns Driller
J. T. Arms Driller _____ Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 28th July 1939

Midland, Texas July 25, 1939
 Place Date

day of July 1939

Name E. H. Law

Position Authorized Agent

John Monahan
 Notary Public

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	60		Caliche
60	314		Caliche and Sand
314	400		Red Rock
400	650		Red Bed
650	935		Red Bed & Shells
935	1095		Shale & Shells
1095	1175		Anhydrite
1175	1330		Anhydrite & Shale
1330	1608		Shale, Anhydrite & Salt
1608	2043		Salt & Anhydrite.
2043	2090		Anhydrite
2090	2150		Salt & Shale
2150	2360		Shale, Anhydrite & Salt
2360	2485		Anhydrite & salt
2485	2555		Anhydrite
2555	2570		Gyp
2570	2582		Gyp & Anhydrite
2582	2593		Sand
2593	2606		Anhydrite
2606	2706		Anhydrite & Gyp
2706	2710		Anhydrite
2710	2787		Shale & Lime
2787	2907		Anhydrite & Lime
2907	3410		Lime
3410	3446		Lime
3446	3450		Sand & Lime
3450	3707		Lime. Total Depth