


NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

MISCELLANEOUS REPORTS ON WELL

Submit this report in triplicate to the Oil Conservation Commission or its proper agent within ten days after the work specified is completed. It should be signed and sworn to before a notary public for reports on beginning drilling operations, results of shooting well, results of test of casing shut-offs, result of plugging of well, and other important operations, even though the work was witnessed by an agent of the commission. Reports on minor operations need not be signed and sworn to before a notary public. See additional instructions in the Rules and Regulations of the Commission.

Indicate nature of report by checking below:

REPORT ON BEGINNING DRILLING OPERATIONS		REPORT ON REPAIRING WELL
REPORT ON RESULT OF SHOOTING OR CHEMICAL TREATMENT OF WELL		REPORT ON PULLING OR OTHERWISE ALTERING CASING
REPORT ON RESULT OF TEST OF CASING SHUT-OFF		REPORT ON DEEPENING WELL
REPORT ON RESULT OF PLUGGING OF WELL	X	

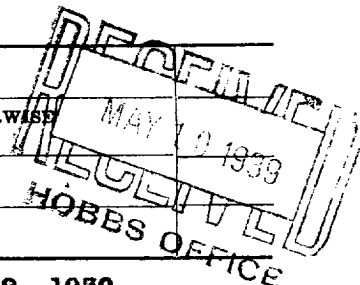

Bristow, Oklahoma,

May 8, 1939

Place

Date

OIL CONSERVATION COMMISSION,
Santa Fe, New Mexico.

Gentlemen:

Following is a report on the work done and the results obtained under the heading noted above at the

Olean Petroleum Company Ferrell Well No. 2 in the
COMPANY OR OPERATOR LEASE

SW SE SE of Sec. 22, T. 22S, R. 37E, N. M. P. M.,
Penrose Field, Lea County

The dates of this work were as follows: Commenced April 28th, Finished May 4th, 1939

Notice of intention to do the work was (~~submitted~~) submitted on Form C-102 on April 23, 1939
and approval of the proposed plan was (~~obtained~~) obtained. (Cross out incorrect words)

DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

Hole was filled with heavy mud to 3300', let mud settle for 24 hrs, then bailed to 3450'. Put in bridge & dumped 28 sacks of cement; let cement set 16 hrs and ran bailer; found top of cement at 3295'. Put in 1000' of heavy mud, ripped 7" csg off at 1900' and filled with heavy mud to 1065'. After 7" pipe was pulled, bailed mud to 1170', put in bridge & dumped 16 sacks of Incon cement. Then filled hole with heavy mud to 350' of top, ripped 8-5/8" csg off at 360', bridged hole and dumped in 18 sacks of Incon cement. Filled hole with heavy mud to 30' of top, bridged and filled to the top with Incon cement. Cemented in 1 joint of 4" pipe and let it extend 4 ft above surface of ground. Casing left in hole: 767' of 8-5/8", 1475' of 7", and 158' of 10", the 10" having been cemented from 158' to surface when run.

Witnessed by L. E. Mix Olean Petroleum Co Tool-pusher.
Name Company Title

Subscribed and sworn to before me this 8th

day of May, 1939
Bert K. K.
Notary Public

I hereby swear or affirm that the information given above is true and correct.

Name R. H. K.

Position Vice-President

Representing OLEAN PETROLEUM COMPANY
Company or Operator

My Commission expires 12/27/41

Address Box 777, Bristow, Oklahoma.

Remarks:

Roy Yankrough
Name
OIL & GAS INSPECTOR
Title