


## OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

## MISCELLANEOUS REPORTS ON WELLS

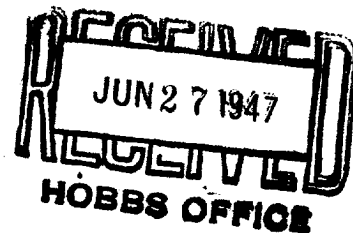

Submit this report in triplicate to the Oil Conservation Commission or its proper agent within ten days after the work specified is completed. It should be signed and sworn to before a notary public for reports on beginning drilling operations, results of shooting well, results of test of casing shut off, result of plugging of well, and other important operations, even though the work was witnessed by an agent of the Commission. Reports on minor operations need not be signed and sworn to before a notary public. See additional instructions in the Rules and Regulations of the Commission.

Indicate nature of report by checking below.

REPORT ON BEGINNING DRILLING OPERATIONS		REPORT ON REPAIRING WELL	
REPORT ON RESULT OF SHOOTING OR CHEMICAL TREATMENT OF WELL		REPORT ON PULLING OR OTHERWISE ALTERING CASING	
REPORT ON RESULT OF TEST OF CASING SHUT-OFF		REPORT ON DEEPENING WELL	
REPORT ON RESULT OF PLUGGING OF WELL	<input checked="" type="checkbox"/>		

June 25, 1947

Hobbs, New Mexico

Date

Place

OIL CONSERVATION COMMISSION,  
SANTA FE, NEW MEXICO.  
Gentlemen:

Following is a report on the work done and the results obtained under the heading noted above at the

Gulf Oil Corporation

Amanda

Well No. 1

in the

Company or Operator

Lease

G. NW SE

of Sec. 25

T. 22 S

R. 37 E

N. M. P. M.,

Drinkard

Field,

Lea

County.

The dates of this work were as follows: Plug back and cemented June 13, 1947

Notice of intention to do the work was (was not) submitted on Form C-102 on June 20, 1947

and approval of the proposed plan was (was not) obtained. (Cross out incorrect words.)

## DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

On June 13, 1947 well was plugged back from 7174' to 6923' with 5-1/2 Lane Wells bridge plug and 6 sacks El Toro Neat Cement. Perforated 5-1/2" casing at 5125' to 5220' with six 15/32 holes per foot. by Lane Wells. Swabbed small show of Oil and Gas. Acidized with 100 gallon and Swabbed load oil and acid water. Reacidized with 5000 gallon. Swabbed 139 bbl. of salt water in 24 hours. Load oil from acid jobs were never fully recovered. Ran tubing with Baker retrievable cement retainer set at 5047. Squeeze cemented with 150 sacks El Toro Cement sealing perforations at 5125 to 5220. Drilling out plugs to 7170' as reported on C-103 dated June 19, 1947.

Witnessed by N. J. Jordan Gulf Oil Corporation Foreman  
Name Company Title

Subscribed and sworn before me this

I hereby swear or affirm that the information given above is true and correct.

25 day of June, 1947

Name Charles Taylor

Position Acting District Sup't.

Representing Gulf Oil Corporation

Company or Operator

Box 1667 Hobbs, New Mexico

Address

My commission expires 10-24-49

Notary Public

Remarks:

APPROVED  
JUN 27 1947  
Date

Roy Yarrrough  
Name  
Oil & Gas Inspector  
Title

