


N


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD



Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

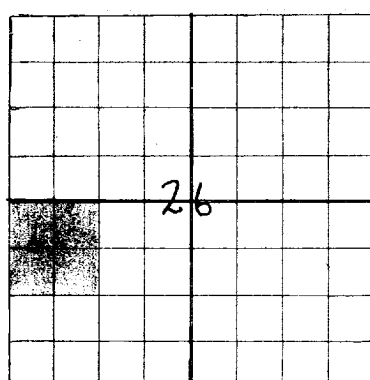

AREA 640 ACRES
LOCATE WELL CORRECTLY

Lem Peters

Midland, Texas

Company or Operator

Address

M. W. Coll

Well No. 2

in NW/4 SW/4 Sec. 26

T. 22S

R. 37E

N. M. P. M.

Penrose

Field,

Lea

County.

Well is _____ feet south of the North line and _____ feet west of the East line of _____

If State land the oil and gas lease is No. _____ Assignment No. _____

If patented land the owner is M. W. Coll Address Roswell, N.M.

If Government land the permittee is _____ Address _____

The Lessee is Lem Peters Address Midland, Texas

Drilling commenced April 10, 1939 Drilling was completed May 27, 1939

Name of drilling contractor Lem Peters Address Midland, Texas

Elevation above sea level at top of casing 3322 feet.

The information given is to be kept confidential until _____ 19____

OIL SANDS OR ZONES

No. 1, from 3540 to 3640 No. 4, from _____ to _____

No. 2, from _____ to _____ No. 5, from _____ to _____

No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 115 to 130 feet.

No. 2, from _____ to _____ feet.

No. 3, from _____ to _____ feet.

No. 4, from _____ to _____ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
15 1/2	70lbs.	8	Used	100'	Tex/Pat				
8 5/8	28lbs.	8	"	1135'	"				
7 OD	22lbs.	8	Beth.	3349'	"				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
10"	8 5/8	1135	100	Pump & Plug		
8"	7 OD	3349	175	" "		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____

Adapters—Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
5"	Tin	Liquid Gly.	400 qts.	5/28/39	3540-3640	

Results of shooting or chemical treatment Well started flowing.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

Cable tools were used from 0 feet to 3646 feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing June 11, 1939 19____

The production of the first 24 hours was 65 barrels of fluid of which 100 % was oil; _____ %

emulsion; _____ % water; and _____ % sediment. Gravity, Be _____

If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____

Rock pressure, lbs. per sq. in. _____

EMPLOYEES

L. H. Horner Driller J. G. Matthews Driller

T. C. Teener Driller L. T. Toombs Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 12th

day of June 1939

Barberly Chambers

Notary Public

My Commission expires June 1, 1941

Name Lem Peters Date _____

Position _____

Representing Lem Peters

Company or Operator

Address Midland, Texas

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	40	40	Caliche
40	100-	60	Red Rock
100	115	15	Sand
115	130	15	Water Sand
130	145	15	Sandy Blue Shale
145	205	60	Red Rock
205	250	45	Sand
250	690	440	Red Rock
690	800	110	Sandy Shale
800	835	35	Red Rock & Blue Shale
835	855	20	Blue Shale
855	1129	274	Red Rock
1129	1235	106	Anhydrite
1235	1280	45	Anhydrite & Salt
1280	1290	10	Salt
1290	1310	20	Red Rock
1310	1375	65	Red Rock, Potash & Salt
1375	1440	65	Salt & Red Rock
1440	1470	30	Salt & Potash
1470	1490	20	Anhydrite, Salt & Potash
1490	1505	15	Anhydrite & Potash
1505	1550	45	Salt & Potash
1550	1555	5	Anhydrite
1555	1590	35	Salt & Potash
1590	1615	25	Anhydrite
1615	1670	55	Salt & Potash
1670	1755	85	Salt, Anhydrite & Potash
1755	1880	125	Potash & Salt
1880	1890	10	Anhydrite & Potash
1890	2050	60	Salt & Potash
2050	2165	115	Salt, Anhydrite & Potash
2165	2450	285	Salt & Potash
2450	2665	215	Anhydrite
2665	2690	25	Anhydrite & Red Rock
2690	2720	30	Anhydrite & Shale
2720	2745	25	Anhydrite & Red Rock
2745	2885	140	Anhydrite
2885	2975	90	Lime

Coll No 2