

## NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

## NOTICE OF INTENTION TO DRILL

Notice must be given to the Oil Conservation Commission or its proper agent and approval obtained before drilling begins. If changes in the proposed plan are considered advisable, a copy of this notice showing such changes will be returned to the sender. Submit this notice in triplicate. One copy will be returned following approval. See additional instructions in Rules and Regulations of the Commission.


Hobbs, New MexicoMarch 30, 1939

OIL CONSERVATION COMMISSION,  
Santa Fe, New Mexico.  
Gentlemen:

DUPLICATE

You are hereby notified that it is our intention to commence the drilling of a well to be known as

SKELLY OIL COMPANY A. B. BAKER "A" Well No. 2 in CSW SW NW  
Company or Operator Lease  
of Sec. 26, T. 22S, R. 37E, N. M. P.M., Penrose Field, Lea County.  
N.

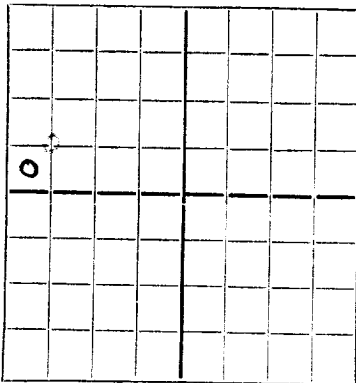

AREA 640 ACRES  
LOCATE WELL CORRECTLY

The well is 2310 feet (X) (S.) of the North line and 330 feet  
(E.) (X) of the West line of Section 26-22S-37E.

(Give location from section or other legal subdivision lines. Cross out wrong directions.)

If state land the oil and gas lease is No. \_\_\_\_\_, Assignment No. \_\_\_\_\_

If patented land the owner is Abraham B. Baker

Address Eunice, New Mexico

If government land the permittee is \_\_\_\_\_

Address \_\_\_\_\_

The lessee is \_\_\_\_\_

Address \_\_\_\_\_

We propose to drill well with drilling equipment as follows:

Cable tools (Ft. Worth Spudder) from top to total depth.

The status of a bond for this well in conformance with Rule 39 of the General Rules and Regulations of the Commission is as follows: \_\_\_\_\_

We propose to use the following strings of casing and to land or cement them as indicated:

Size of Hole	Size of Casing OD	Weight Per Foot	New or Second Hand	Depth	Landed or Cemented	Sacks Cement
17"	16"	70#	SH	150'	Cemented	100
15 1/2"	13"	40#	SH	445'	Landed	
12 1/2"	10 1/2"	40#	SH	710'	Landed	
9 1/2"	8-5/8"	38#	SH	1170'	Landed	
8 1/2"	7"	24#	New	3415'	Cemented	200

If changes in the above plan become advisable we will notify you before cementing or landing casing. We estimate that the first productive oil or gas sand should occur at a depth of about 3515' feet.

Additional information: In cementing the 16" OD casing the cement will be circulated back into the bottom of the cellar. The 13" OD, the 10-3/4" OD and the 8-5/8" OD casing will all be pulled at the time the 7" OD casing is run and cemented.

Approved MAR 30 1939, 19\_\_\_\_  
except as follows:

Sincerely yours,

SKELLY OIL COMPANY  
Company or Operator

By J. J. J. J.Position District Supt.

Send communication regarding well to

Name Skelly Oil Co.Address Hobbs, New Mexico

OIL CONSERVATION COMMISSION,

By Roy YarbroughTitle OIL & GAS INSPECTOR

© 2004 Blackwell Publishing Ltd *Journal of Internal Medicine* 255: 103–110

SECRETARY OF THE ARMY