


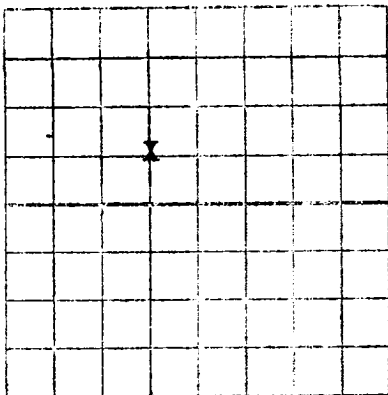

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION

SANTA FE, NEW MEXICO

WELL RECORD

1 AM 9-42

MAIL TO DISTRICT OFFICE, OIL CONSERVATION COMMISSION, TO WHICH FORM
C-101 WAS SENT NOT LATER THAN TWENTY DAYS AFTER COMPLETION OF WELL.
FOLLOW INSTRUCTIONS IN RULES AND REGULATIONS OF THE COMMISSION.
SUBMIT IN QUINTUPPLICATE.

HUMBLE OIL & REFINING COMPANY

NEW MEXICO STATE "M"

(COMPANY OR OPERATOR) (LEASE)
WELL NO. 20, IN SE 1/4 OF NW 1/4, OF SEC. 29, T. 22-S, R. 37-E, NMPM.
Langlie Mattix POOL, Lea COUNTY.
WELL IS 1980 FEET FROM North LINE AND 1980 FEET FROM West LINE
OF SECTION 29 IF STATE LAND THE OIL AND GAS LEASE NO. B-934
DRILLING COMMENCED February 27, 1960 DRILLING WAS COMPLETED May 15, 1960
NAME OF DRILLING CONTRACTOR R. S. Wiggins, Hobbs, New Mexico & Leatherwood Drlg Co.
ADDRESS Kermit, Texas
ELEVATION ABOVE SEA LEVEL AT TOP OF TUBING HEAD 3379 DF THE INFORMATION GIVEN IS TO BE
KEPT CONFIDENTIAL UNTIL 19

OIL SANDS OR ZONES

NO. 1, FROM 3622 TO 3632 NO. 4, FROM TO
NO. 2, FROM 3642 TO 3650 NO. 5, FROM TO
NO. 3, FROM TO NO. 6, FROM TO

IMPORTANT WATER SANDS

INCLUDE DATA ON RATE OF WATER INFLOW AND ELEVATION TO WHICH WATER ROSE IN HOLE.

NO. 1, FROM TO FEET.
NO. 2, FROM TO FEET.
NO. 3, FROM TO FEET.
NO. 4, FROM TO FEET.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
9 5/8	32.3	New	1155	Howes Guide	-	-	Surface
2 7/8	6.4	New	3717	Howes Guide	-	3622-32 & 3642-50	Production

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
12 1/4	9 5/8	1353	800	Pump & Plug	-	-
8 3/4	2 7/8	3730	200	Pump & Plug	-	-

RECORD OF PRODUCTION AND STIMULATION

(RECORD THE PROCESS USED, NO. OF QTS. OR GALS. USED, INTERVAL TREATED OR SHOT.)

Fraced perforations 3622-3632 & 3642-3650 w/15,000 gallons refined oil &
30,000# sand.

RESULT OF PRODUCTION STIMULATION After recovering load oil, well flowed 60 barrels in
18 hours.