
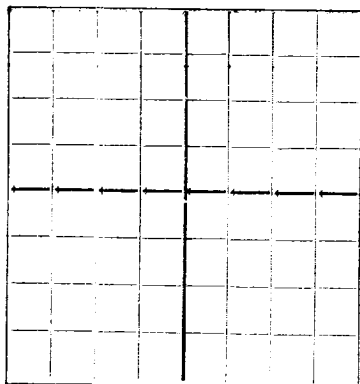


N.

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico



HOBBS OFFICE

WELL RECORD

DUPLICATE

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Danzon-Clover

Eunice, N.M.

Company or Operator

Address

Rosa Glier

Well No. 1

3 NE

of Sec. 32

T. 22

Lease

P. 10000

Lea

R. 37

N. M. P. M.

Field,

County.

Well is 1980 feet south of the North line and 1980 feet west of the East line of Sec. 33 T 22 R 37

If State land the oil and gas lease is No. Assignment No.

If patented land the owner is Rosa Glier

Address

If Government land the permittee is Address

The Lessee is Address

Drilling commenced Jan. 17, 1938 Drilling was completed March 19, 1938

Name of drilling contractor J.C. Clower Eunice, N.M.

Address

Elevation above sea level at top of casing feet.

The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 3555 to 3570 No. 4, from to

No. 2, from 3620 to 3650 No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 70 to 110 feet.

No. 2, from 150 to 190 feet.

No. 3, from 745 to 760 feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
10 1/2	35	8		140				surface
8 5/8	29.35	8		1150				salt string
7 1/2	22	10		3390	Guide			oil string

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
18	10 1/2	140	100	Pump & plug	10 lb	hole full
10	8 5/8	1150	100	" "	10 lb	hole full
8	7 1/2	3390	150	" "	10 lb	hole full

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
70 Ft	5 in	Glycerine	260 qts	3/26/38	3520-35	3680
		H C Acid	6,000 gal.	3/15/38	3600-50	

Results of shooting or chemical treatment. Increased flow from 10 bbls ea. 3 hours to 20 bbls. ea. 3 hours.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet

Cable tools were used from 0 feet to 3680 feet, and from feet to feet

PRODUCTION

Put to producing Mar. 19 1938

The production of the first 20 hours was 20 barrels of fluid of which % was oil: 100 %

emulsion; % water; and % sediment. Gravity, Be.

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in. 1000

EMPLOYEES

Fred Whitaker Driller F.H. French Driller

Geo. Baker Driller Jay D. Cravens Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 29th

day of March 1938

George W. Lanning
Notary Public

My Commission expires March 14, 1940

Place Date

Name J.C. Clower

Position

Representing

Company or Operator

Address

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	10	10	Cellar
10	110	100	sand
110	150	40	Brown Shale
150	190	40	Water Sand
190	648	458	Red Shale
648	690	42	Sandy Shale
690	720	30	Water Sand
720	745	25	Blue Shale
745	760	15	Water Sand
760	815	55	Hard Sand
815	1146	331	Red Shale
1146	1265	119	Anhydrite
1265	1840	575	Shale & Salt
1840	2295	455	Salt & Potash
2295	2472	177	Anhydrite & Salt
2472	2655	382	Anhydrite
2655	2850	195	Anhydrite & Shale
2850	2860	10	Lime
2860	3360	500	Lime & Anhydrite
3360	3390	30	Lime
3390	3402	12	Lime & Anhydrite
3402	3555	153	Lime
3555	3570	15	Oil Sand
3570	3680	110	Lime