
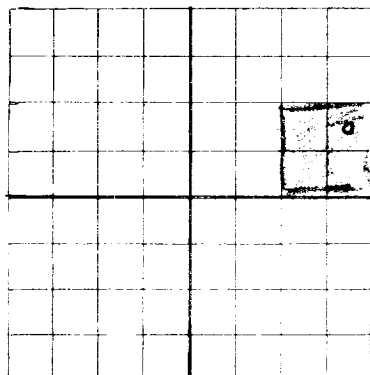


N

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico



TRIPPLICATE

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE.

Stampfli and Martin

800 North Turner Street, Hobbs, New Mex.

Company or Operator

Address

George Glier

Well No. 2

NE SE NE of Sec. 33

T. 22 S

Lease

R. 37 East, N. M. P. M., Skelly Field, Lea County.

Well is 1650 feet south of the North line and 330 feet west of the East line of Section

If State land the oil and gas lease is No. Assignment No.

If patented land the owner is George Glier et al, Address Pecos, Texas

If Government land the permittee is - - - - - Address

The Lessee is Stampfli and Martin (Shell), Address

Drilling commenced 2-11-40, Drilling was completed 3-20-40

Name of drilling contractor Stampfli and Martin, Address

Elevation above sea level at top of casing feet.

The information given is to be kept confidential until Not confidential 19

OIL SANDS OR ZONES

No. 1, from to No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 3565 to 3585 feet. Sand

No. 2, from 3635 to 3654 feet. Sand

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM	TO	PURPOSE
15 1/2"	90	8 Thd		120'	T.P.				
12 1/2"	80	8 Thd		1150'	T.P.				
7"	24	8 Thd.		3460	Larkin Float Shoe.				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
18"	15 1/2"	150	100	Halliburton		
15 1/2"	12 1/2"	450	Landed		(Pulled)	
12"	10"	750	Landed		(Pulled)	
10"	8"	1150	Landed		Unable to pull.	Left in hole.
8 1/2"	7"	3450	150			

PLUGS AND ADAPTERS

Heaving plug—Material None Length Depth Set

Adapters—Material None Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
5 1/2"	33	L. N. G.	650 Qts	3/18/40	3560-3700	

Results of shooting or chemical treatment Satisfactory.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet

Cable tools were used from 0 feet to 3702 feet, and from feet to feet

PRODUCTION

Put to producing March 19 40

The production of the first 24 hours was 97 b/o 12 hour test barrels of fluid of which 100% was oil None% emulsion; None% water; and 4% sediment. Gravity, Be 38.

If gas well, cu. ft. per 24 hours Not tested Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in. Not tested.

EMPLOYEES

R. M. Jones

Driller F. L. Smith

Driller

Ira O. Jiant

Driller

Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 29

day of March 19 40

M. Armo Bell

Notary Public

My Commission expires Nov. 20, 1945

Name Stampfli

Position Partner

Representing Stampfli and Martin

Company or Operator

Address 800 N. Turner Street Hobbs, New Mexico

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	26		Caliche.
26	100		Sand.
100	206		Red Beds.
206	240		Shale.
240	460		Red Rock.
460	640		Shale.
640	740		Red Rock.
740	750		Sand
750	790		Red Beds.
790	800		Sand
800	905		Red Rock
905	1080		Red Beds.
1080	1155		Red Rock.
1155	1230		Anhydrite.
1230	1430		Anhydrite, Salt, and Red Rock.
1450	1635		Anhydrite and Salt.
1635	1775		Salt and Anhydrite.
1775	1855		Salt and Anhydrite and Red Rock.
1855	1915		Salt.
1915	1935		Potash.
1935	1950		Salt and Anhydrite.
1950	2110		Potash.
2130	2265		Salt.
2265	2535		Salt and Anhydrite.
2535	2900		Anhydrite.
2900	3365		Lime.
3365	3565		Lime.
3565	3585		Sand
3585	3635		Lime.
3635	3654		Sand.
3654	3702	TD	Lime.