


N

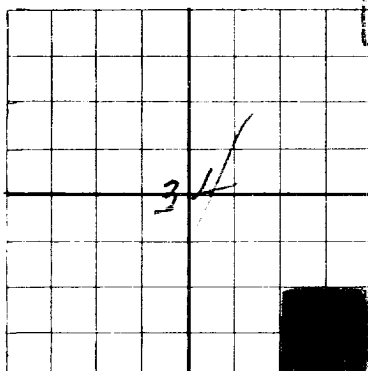


AREA 640 ACRES
LOCATE WELL CORRECTLY

TRIPPLICATE
NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

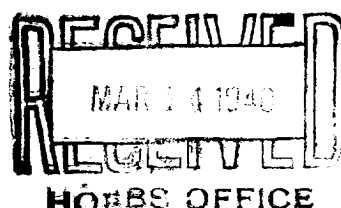

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Peters and Elder

Midland, Texas

Company or Operator

Address

Humble State H Well No. 3 in SE/4 of Sec. 34, T. 22-S

R. 37-E N. M. P. M. Penrose Field, Lea County.

Well is 330 feet North of the North line and 990 feet West of the East line of Sec. 34, 22-S, 37-E Lea County.

If State land the oil and gas lease is No. B-934 Assignment No.

If patented land the owner is Address

If Government land the permittee is Address

The Lessee is Peters & Elder Address Midland, Texas

Drilling commenced January 21, 1940 Drilling was completed March 12, 1940

Name of drilling contractor Lem Peters Address Midland, Texas

Elevation above sea level at top of casing 3306 feet.

The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 3560 to 3648 No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 195 to 230 feet.

No. 2, from 800 to 850 feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
15 1/2"	50	8		150'	Tex. Pat.				Shut off
13" OD	50	8		430'	Tex. Pat.				Shut off
10"	40	8		700'	Tex. Pat.				Shut Off
8 5/8"	28	8		1186'	Tex. Pat.				Shut Off
7" OD	22	8R		3342'	Tex. Pat.				Shut Off

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
18"	15 1/2"	150'				
10"	8 5/8"	1186'	100			
8"	7"	3342'	150			

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
4"	Tin	Nitro-Glycerin	220 qts.	2-28-29	3648'	

Results of shooting or chemical treatment Well made 60 barrels in 24 hours after shot.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet

Cable tools were used from 0 feet to 3648 feet, and from feet to feet

PRODUCTION

Put to producing March 12, 1940

The production of the first 24 hours was 60 barrels of fluid of which 100% was oil;

emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

J. W. Whaley Driller L. H. Horner Driller

R. Thacker Driller J. L. Saunders Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 12th

Midland Texas

day of March 1940

Name Ruby Thompson

Position Secretary

Representing Peters & Elder Company or Operator

Address Midland, Texas

My Commission expires June 1, 1941

Notary Public

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	8	8	Sand and Cliche
8	95	87	Red Rock
95	110	15	Sandy Red Shale
110	135	25	Sandy Red Rock
135	180	45	Blue Shale
180	195	15	Red Rock
195	230	35	Sand
230	280	50	Red Rock
280	270	20	Blue Shale
270	310	40	Red Rock
310	360	50	Sand
360	500	140	Red Rock
500	520	20	Sandy Shale
520	525	5	Red Rock
525	565	40	Gray Shale
565	700	135	Red Rock
700	750	50	Gray Shale
750	755	5	Red Rock
755	830	75	Sand
830	845	15	Red Rock
845	865	20	Blue Shale
865	885	20	Red Rock
885	955	70	Sand
955	1162	207	Red Rock
1162	1270	108	Anhydrite
1270	1325	55	Salt and Anhydrite
1325	1390	65	Anhydrite and Red Rock
1390	1470	80	Salt, Anhydrite and Red Rock
1470	1510	40	Anhydrite
1510	1525	15	Salt
1525	1595	70	Salt, Anhydrite and Red Rock
1595	1720	125	Salt and Anhydrite
1720	1730	10	Anhydrite
1730	1900	170	Salt, Potash and Red Rock
1900	1930	30	Anhydrite and Potash
1930	1970	40	Salt and Red Rock
1970	2055	85	Salt and Potash
2055	2110	55	Anhydrite and Potash
2110	2175	65	Salt, Potash and Red Rock
2175	2240	65	Salt, Anhydrite and Potash
2240	2295	55	Anhydrite
2295	2325	30	Salt and Potash
2325	2455	130	Salt
2455	2880	425	Anhydrite
2880	2920	40	Anhydrite and Lime
2920	3320	400	Lime
3320	3330	10	Anhydrite
3330	3342	12	Lime
3342	3560	218	Lime
3560	3600	40	Sandy Lime
3600	3630	30	Sand
3630	3648	18	Lime

Sum 11 57 4 43
Total