


TRIPPLICATE

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

MISCELLANEOUS NOTICES

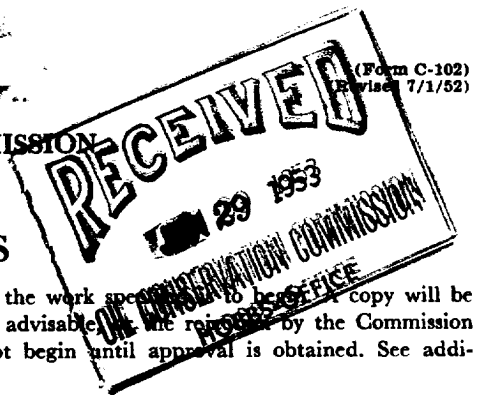

Submit this notice in TRIPLICATE to the District Office, Oil Conservation Commission, before the work specified in the notice is begun. One copy will be returned to the sender on which will be given the approval, with any modifications considered advisable. The plan as approved should be followed, and work should not begin until approval is obtained. See additional instructions in the Rules and Regulations of the Commission.

Indicate Nature of Notice by Checking Below

NOTICE OF INTENTION TO CHANGE PLANS		NOTICE OF INTENTION TO TEMPORARILY ABANDON WELL		NOTICE OF INTENTION TO DRILL DEEPER	
NOTICE OF INTENTION TO PLUG WELL		NOTICE OF INTENTION TO PLUG BACK		NOTICE OF INTENTION TO SET LINER	
NOTICE OF INTENTION TO SQUEEZE		NOTICE OF INTENTION TO ACIDIZE		NOTICE OF INTENTION TO SHOOT (Nitro)	
NOTICE OF INTENTION TO GUN PERFORATE		NOTICE OF INTENTION (OTHER) Recomplete	XI	NOTICE OF INTENTION (OTHER)	

OIL CONSERVATION COMMISSION
SANTA FE, NEW MEXICO

Hobbs, New Mexico
(Place)

June 27, 1953
(Date)

Gentlemen:

Following is a Notice of Intention to do certain work as described below at the H. O. Sims

Skelly Oil

(Company or Operator)

Well No. 16 in 1/4 (Unit)

SW 1/4 SW 1/4 of Sec. 24, T. 22S, R. 37E, NMPM, Drinkard Pool

Lee County.

FULL DETAILS OF PROPOSED PLAN OF WORK
(FOLLOW INSTRUCTIONS IN THE RULES AND REGULATIONS)

The above well was drilled to total depth of 6650'. No oil or gas in commercial quantities were encountered through any zone. Well was plugged and abandoned 3/25/49, leaving 2800' of 8-5/8" casing in hole that had been cemented to surface. It is now our intention to recomplete this well for a water supply well for the proposed Penrose-Skelly Pilot Waterflood project. Will drill out cement plugs and wash hole to top of the bottom 50-inch plug. Will then run a 50-inch plug filling hole to approx. 5775'. Will run caliper survey and determine packer point for casing anchor packer. Will then run a string of 5 1/2" casing with anchor packer around 5100' and perforations below packer. Will test for water in the Glorieta section and if water volume is sufficient for water-flooding purpose, will run tubing and rods and equip well to pump.

JUN 29 1953

Approved....., 19.....
Except as follows:

Approved
OIL CONSERVATION COMMISSION

By Roy Guthrough
Oil & Gas Inspector
Title

Skelly Oil Company

(Company or Operator)

By J. J. Miller

Position Dist. Supt.

Send Communications regarding well to:

Name Skelly Oil Company

Address Box 38 - Hobbs, New Mexico