

Form 9-331a  
(Feb. 1951)

Budget Bureau No. 42-13384  
Approval expires 12-31-60.


(SUBMIT IN TRIPLICATE)

Land Office New Mexico

Lease No. 01187

Unit General Fill

Subject to the condition on back of  
this sheet

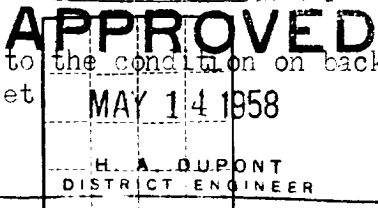

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL	<input checked="" type="checkbox"/>	SUBSEQUENT REPORT OF WATER SHUT-OFF	
NOTICE OF INTENTION TO CHANGE PLANS		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF		SUBSEQUENT REPORT OF ALTERING CASING	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL		SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE		SUBSEQUENT REPORT OF ABANDONMENT	
NOTICE OF INTENTION TO PULL OR ALTER CASING		SUPPLEMENTARY WELL HISTORY	
NOTICE OF INTENTION TO ABANDON WELL			

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

Aug 15, 19 58

Well No. 4 is located 1980 ft. from S line and 1980 ft. from W line of sec. 20  
S 1/4 20 23S 30E N 47° 15' W  
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)  
Jalisco La Brea New Mexico  
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is \_\_\_\_\_ ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

CONCRETE PIPE & CAS COMPANY - Well No. 4 - General Fill Lease

8 5/8" cas 21# 100' 325' 300 lbs

5 1/2" cas 11-15.5# " 3750' 300 lbs

Propose to drill this well to approximately 3750' to test the latest  
sand 3600'-TD.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company CONCRETE PIPE & CAS COMPANY

Address Box 1470

Midland, Texas

By [Signature]  
H. A. Flinbaugh  
Title Asst. Division Supt. - Prod. Dept.

The approval is subject to the following:

1. Cement behind the 8" casing and cover the salt section as determined by temperature survey or the salt section must be isolated by use of a two-stage cementing process.