


N

## NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

## WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

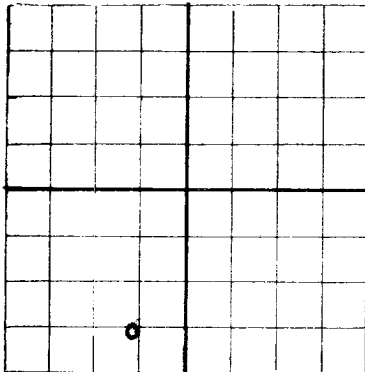

AREA 640 ACRES  
LOCATE WELL CORRECTLY

Gulf Oil Corporation

P.O. Box 661, Tulsa 2, Oklahoma

Company or Operator

Address

Gutman

Well No. 1

in SE SW

of Sec. 19

T. 22N

Lease

R. 30E, N. M. P. M., Drinkard Field, Lea County.

Well is 1980 feet south of the North line and 660 feet west of the East line of SW/4

If State land the oil and gas lease is No. Assignment No.

If patented land the owner is George W. Sims, Address Lea County, New Mexico

If Government land the permittee is, Address

The Lessee is Gulf Oil Corporation, Address P.O. Box 661, Tulsa, Oklahoma

Drilling commenced 11-9-1944 Drilling was completed 2-12-1945

Name of drilling contractor Ashby Drilling Co., Address Dallas 4, Texas

Elevation above sea level at top of casing 3345' feet. DF elevation 3356'

The information given is to be kept confidential until 19

## Fullerton Pay

## OIL SANDS OR ZONES

No. 1, from 6390' to 6474' No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

## IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

## CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
13 3/8"	48	8R	Smls.	312					
8 5/8"	32	10V	Smls.	2553					
5 1/2"	*	8R	Smls.	7005	Std.		6845'	6960'	Production
							6635'	6840'	Production
							6280'	6575'	Production
*7 Jts. 17#; 42 Jts. 15.5#; 149 Jts. 14#; 20 Jts. 15.5# & 1 Jt. 17# on top.									

## MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17"	13 3/8"	312	285	Howco		
11"	8 5/8"	2553	1400	Howco		
7 7/8"	5 1/2"	7005	775	Howco		

## PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size Lane Wells plug 6880'.

Lane Wells plug 6840'-42'

## RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Acid	2000	3-7-45	6280-6480	TD 6480
		Acid	5000	3-15-45	6280-6480	P/B from
		Acid	10000	3-29-45	6280-6480	7010

Results of shooting or chemical treatment

## RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

## TOOLS USED

Rotary tools were used from 0 feet to 7010 feet, and from feet to feet

Cable tools were used from feet to feet, and from feet to feet

## PRODUCTION

Put to producing 4/12/45 19

The production of the first 24 hours was 37 barrels of fluid of which % was oil; %

emulsion; 10 % water; and % sediment. Gravity, Be 38.2

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

## EMPLOYEES

Ashby Drilling Company Driller Driller

Driller Driller

## FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 24th

Tulsa, Oklahoma July 24, 1945

day of July 1945

Name J. Lee

Position General Superintendent

Representing Gulf Oil Corporation

Company or Operator

My Commission expires March 16, 1948

Address P.O. Box 661, Tulsa, Oklahoma

## FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0'	40'		caliche & surface sand
	90		caliche & surface sand
	96		water sand
	270		red bed & shells
	316		red bed & shale, blue
	451		red bed & blue shale
	645		red bed, shells & shale
	822		red bed & shells
	913		lime
	1075		red bed & shells
	1175		shale & anhy streaks
	1218		anhy
	1348		anhy shells & shale
	1608		anhy & salt
	1744		anhy, salt & shells
	1815		salt & anhy
	1891		salt, shells & shale
	1995		salt, anhy & shells
	2070		anhy & streaks salt
	2145		anhy, salt & gyp
	2208		salt & anhy
	2268		salt streaks & anhy
	2412		salt & anhy
	2419		anhy
	2493		anhy & salt streaks
	2554		anhy
	2563		anhy & lime
	2575		green shale
	2639		anhy
	2688		anhy & shale streaks
	2690		anhy
	2710		anhy & shale
	2845		anhy
	2869		Lime & anhy (Yates sand 2845')
	2916		anhy
	3010		anhy & lime
	3059		anhy
	3175		lime
	3219		anhy
	3266		lime & shale
	3288		lime
	3350		lime & anhy
	3415		lime
	3499		lime & anhy
	4538		lime
	4580		lime & anhy
	5515		lime
	5525		cored lime
	5535		cored lime
	5559		lime
	6395		lime
	6405		cored lime
	6414		cored lime
	6435		lime
	6440		cored lime
	6442		cored lime
	6449		cored lime
	6456		cored lime
	6468		lime
	6474		cored lime
	6475		cored lime
	6717		lime
	6727		cored lime
	7010		lime TOTAL DEPTH

MFM:pw