

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

Form Approved.  
Budget Bureau No. 42-R1424

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☒ well gas ☐ well other ☐  
2. NAME OF OPERATOR  
TEXACO Inc.  
3. ADDRESS OF OPERATOR  
P. O. Box 728, Hobbs, NM 88240  
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
AT SURFACE: 660' FNL & 660' FEL  
AT TOP PROD. INTERVAL:  
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA


REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐  
FRACTURE TREAT ☐  
SHOOT OR ACIDIZE ☐  
REPAIR WELL ☐  
PULL OR ALTER CASING ☐  
MULTIPLE COMPLETE ☐  
CHANGE ZONES ☐  
ABANDON\* ☐

SUBSEQUENT REPORT OF:

☐  
☐  
☐  
☐  
☐  
☐  
☐  
☐  
☐  
☐

(other) To: Downhole Commingle

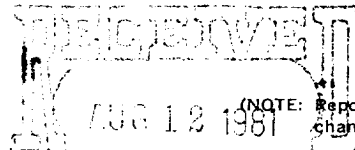

OIL & GAS  
U.S. GEOLOGICAL SURVEY  
ROSWELL, NEW MEXICO

5. LEASE

LC-032104

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

A. H. Blinebry Fed. NCT-1

9. WELL NO.

9

10. FIELD OR WILDCAT NAME

Blinebry & Drinkard

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

Sec. 19, T-22-S, R-38-E

12. COUNTY OR PARISH

Lea

13. STATE

New Mexico

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)

3387' (DF)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

1. Rig up. Install BOP. Pull tubing.
2. Drill out CIBP @ 6445'.
3. Set RBP @ 5700' & Pkr. @ 5560'. Acidize Blinebry perfs. 5606' - 5658' W/1000 Gal. 2% KCL gelled water followed W/2000 Gals. 20% NEFE Acid in 2-stages using 300# rock salt between stages. Flush W/33 Bbls. 2% KCL Water. Pull RBP & Pkr.
4. Set Pkr. @ 6820'. Acidize Drinkard perfs. 6888- 7138'W/1000 Gals. 2% KCL water followed W/2000 Gals. 20% NEFE Acid in 2-stages using 500# rock salt between stages. Flush W/39 Bbls. 2% KCL Water.
5. Install pumping equipment. Test & place on production as downhole commingled Blinebry Drinkard Completion. NMOCD Administrative Order DHC-339

Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED

TITLE Asst. Dist. Mgr. DATE 8-10-81

(This space for Federal or State office use)

APPROVED BY

TITLE

CONDITIONS OF APPROVAL, IF ANY:

APPROVED

DATE

AUG 13 1981

A.O.L.

JAMES A. GILLHAM  
DISTRICT SUPERVISOR

\*See Instructions on Reverse Side